


# LUMIPARK


Linear high endurance  
and very high tightness  
for car-parks, industry,  
plant rooms and  
high spaces

IP69K

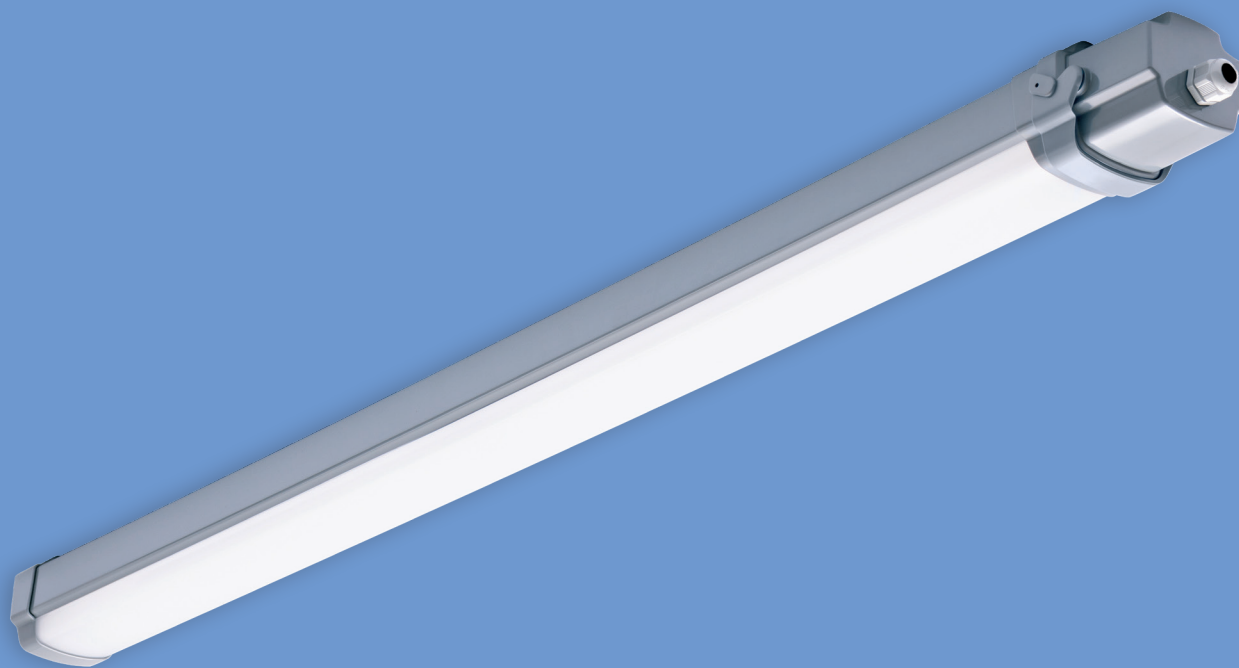

**SÉCURLITE**  
DURABLE LIGHT

DESIGNED AND MADE IN FRANCE  
SINCE 1986




## FEATURES:

- IP66/69K rated waterproof luminaire with IK10/20J impact resistance
- Polycarbonate body and end caps with UV protection
- Opalescent diffuser
- Secure screw closure
- 100% repairable
- Vandal-resistant mounting bracket
- Quick power connection
- ISO M20 cable gland at one end
- Wall and ceiling mounting
- Operating temperature range -20° / +35°C
- CCT 4000 K, CRI min. 80
- 5 years warranty
- RAL 7046 ●

## OPTIONS AVAILABLE ON REQUEST:

- Slave version + extinction warning
- Slave version + standby warning
- With pro détection + radio-control + extinction warning
- With pro détection + radio-control + standby warning

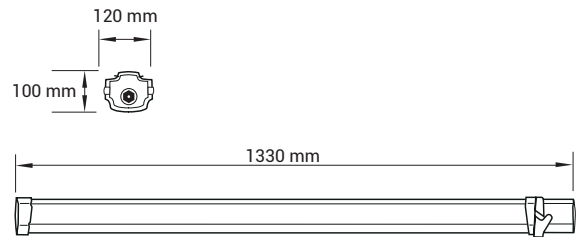


## LUMIPARK


220-240 V AC / 50/60 Hz



Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
35	4200	120	7843 94--
47	5650	120	7844 94--

**Lumen maintenance:** L80B10 / over 72,000 h

 Radio remote control to be ordered separately  
code: 9800 0010

 Torx + pin tool for vandal-resistant screws to be ordered separately  
code: 9800 0041 (+ bit-holder : 9800 0005)

**Coding:** replace the two dashes (--) by the corresponding figures:  
example 7843 94--

- 00 NO DETECTION
- 10 WITH NON-CHAINING DETECTION (ONLY ON THE 5650 LM VERSION)
- 11 WITH DETECTION 350VA max
- 16 WITH PRO DETECTION 700VA max + RADIO-CONTROL
- 21 DALI DIMMABLE + SWITCH DIMMING



Innovative lever locking system for quick and easy installation. Torx screw locking.

