


Specification text

BANG ROUND ACCESS LED - FP0010

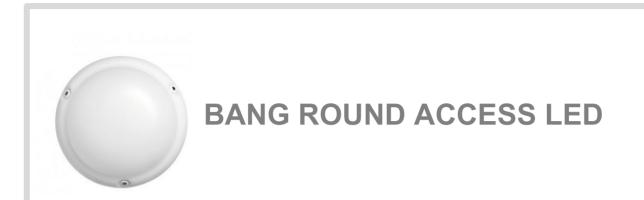

Wall or ceiling mounted luminaire type BANG ROUND ACCESS LED from SÉCURLITE or technically equivalent:

- Dimensions: Ø 320 x 103 mm
- Class II IP55 IK11 / 50J VK35 version wall VK36 version ceiling 850°C CRI 80 SDCM 5 photobiological hazard: RG0
- Consolidated polycarbonate base available in white
- Opalescent polycarbonate diffuser with 3 captive vandal-resistant stainless steel screws
- Screw washers: throught-coloured polycarbonate
- · Anti-rip-out-skirt, 4 internal fixing points
- 1 cable entry for Ø 20,5 mm conductors + 1 knockout cable entry for Ø 20,5 mm conductors supply terminal block: automatic dual-entry for conductors
- CCT, power, luminaire output and efficacy: refer to the technical data sheet according to product code
- Options available on request: with detection. Refer to the technical data sheet according to product code
- Range available in 4000 K
- Lumen maintenance: L70B50 / 50,000 hr 3-year warranty
- Eligible for the BAR-EQ-110 for the detection versions
- Labelled range Origine France Garantie
- Repairable luminaire. Spare parts available on demand.

1

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

26/08/2022