


Specification text BANG SQUARE LED - FP0012

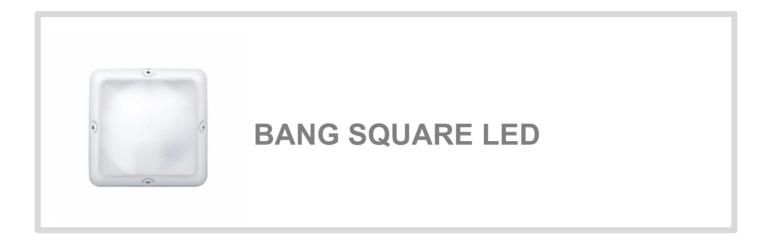

Wall or ceiling mounted luminaire type BANG SQUARE LED from SÉCURLITE or technically equivalent:

- Dimensions: 308 x 308 x 103 mm
- Class II IP55 IK11 / 50J VK35 version wall VK36 version ceiling 850°C CRI 80 SDCM 3 photobiological hazard: RG0
- · Consolidated polycarbonate base available in white
- Opalescent polycarbonate diffuser with 4 captive vandal-resistant stainless steel screws
- · Screw washers: throught-coloured polycarbonate
- Anti-rip-out-skirt, 4 internal fixing points
- 1 knockout cable entry Ø 20,5 mm conductors + 1 cable entry Ø 20,5 mm conductors supply terminal block: automatic dual-entry for conductors
- CCT, power, luminaire output and efficacy: refer to the technical data sheet according to product code
- Options available on request: with detection, DALI dimmable, with Pro detection + extinction or standby
 warning, with Pro detection + radio control, with Pro detection + extinction or standby warning + radio control,
 slave version + extinction or standby warning, slave version + extinction or standby warning + radio control.
 Refer to the technical data sheet according to product code
- Range available in 3000 K or 4000 K
- Lumen maintenance: L80B10 / 72,000 hr 5-year warranty
- Labelled range Origine France Garantie
- Repairable luminaire. Spare parts available on demand.