



BRIKETTE

Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198-264 V AC
- Electrical protection class 1
- IP: 65
- IK: 11+ / 80 joules
- Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- CRI: 80
- SDCM (Standard Deviation Colour Matching): 5
- Photobiological hazard: RG0
- Energy class C light source
- Lumen maintenance: L80B10 / over 72,000 hours
- Lumen maintenance: L90B50 / 52,000 hours
- Repairable luminaire. Spare parts available on demand
- 5-year guarantee, details of conditions available on securlite.com

Applications

- Small, vandal-resistant luminaire for way marking
- Installation positions: refer to installation instructions

Materials

- Base in stainless steel 304L 1mm thick painted and frame in stainless steel 2 mm thick painted
- 316L stainless steel body (stainless steel version)
- Brushed 316L stainless steel frame (stainless steel version)
- Diffuser: opal polycarbonate
- Diffuser: clear pebble polycarbonate for asymmetrical version
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/UE and amendments

Colours / Finish

- 316L brushed stainless
- 304L painted stainless: graphite grey RAL7016, abrasion-resistant polyester paint finish, withstands polluting chemical elements

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

Technical data sheet

BRIKETTE – FT0034

Wiring

- Plug-in gear tray
- Supply terminal block: automatic, dual-entry, for 3 × 1.5 mm² conductors
- 1 × 20.5 mm Ø cable entry for cable gland

Fixings

- Diffuser: retained by M6 stainless 2-point tamper-proof screws with sealing washers

Facilities available

- Anti-graffiti protection: add the suffix **9601** to the product code – example: 5100 1300 **9601**
- Stainless crosspoint screws: add the suffix **9702** to the product code – example: 5100 1300 **9702**

Tools *(to be ordered separately)*


- M6 bit for 2-point tamper-proof screws – code: **9800 0004**
- Bit-holder screwdriver – code: **9800 0005**

Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)

Dimensions

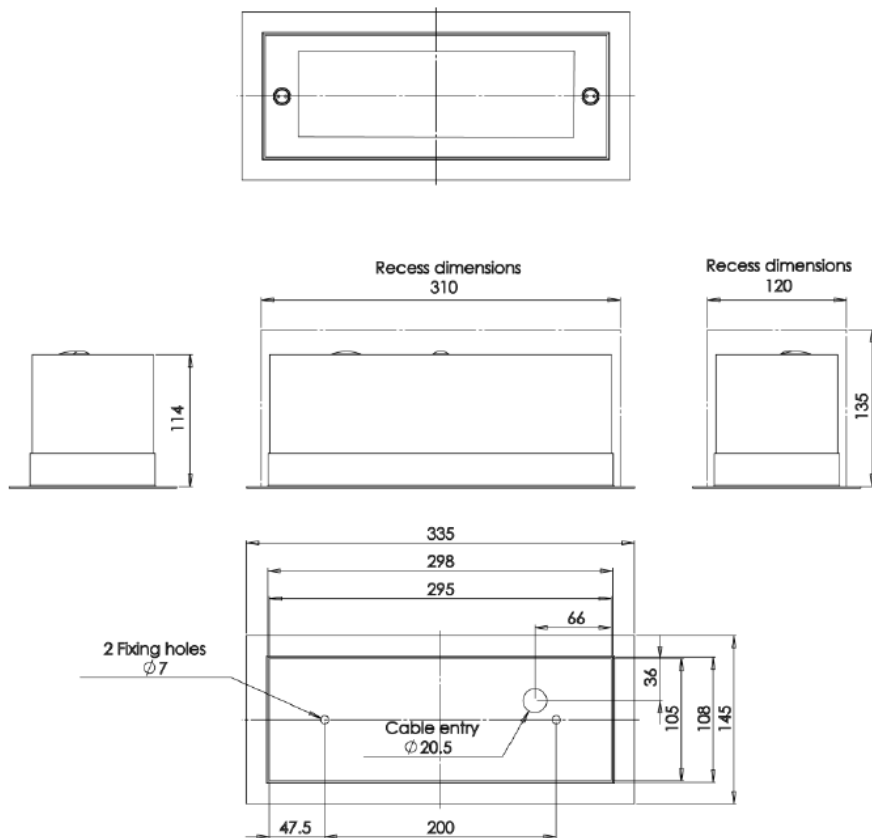

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

Technical data sheet

BRIKETTE – FT0034

Technical data and order codes

BRIKETTE LED						
Designation	CCT (K)	Power (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Référence	Weight (kg)
1 module 1200 lm	3000	10	570	57	51021300	4,3
1 module 1200 lm	4000	10	600	60	51021400	4,3

BRIKETTE LED ASYMETRICAL						
Designation	CCT (K)	Power (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Référence	Weight (kg)
1 module 1200 lm	3000	10	660	66	51031300	4,3
1 module 1200 lm	4000	10	700	70	51031400	4,3

BRIKETTE stainless steel LED						
Designation	CCT (K)	Power (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Référence	Weight (kg)
1 module 1200 lm	3000	10	570	57	51008300	4,3
1 module 1200 lm	4000	10	600	60	51008400	4,3

BRIKETTE stainless steel LED ASYMETRICAL						
Designation	CCT (K)	Power (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Référence	Weight (kg)
1 module 1200 lm	3000	10	660	66	51018300	4,3
1 module 1200 lm	4000	10	700	70	51018400	4,3

Operating instruction : www.securlite.com (NOT0605)