




## SOFFITE

### Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class 1
- IP: 42
- IK: 10 / 20 joules
- Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- VK22 corner mounted
- CRI: 80
- SDCM (Standard Deviation Colour Matching): 3
- Photobiological hazard: RG0
- Energy class C light source
- Lumen maintenance: L80B10 / over 72,000 hr
- Lumen maintenance: L90B50 / 52,000 hr
- Number of detector switching cycles: 1,000,000 at maximum load.
- Repairable luminaire. Spare parts available on demand
- 5-year guarantee, details of conditions available on [securlite.com](http://securlite.com)

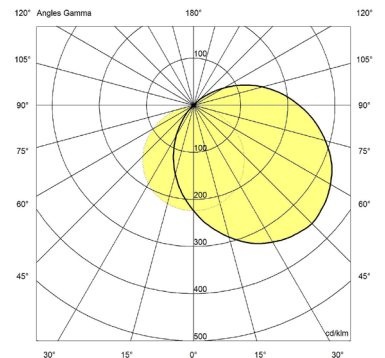

### Applications

- Indoor angle luminaire, vandal-resistant
- Conditions of use:
  - Models with detection: installation indoor only
  - Installation positions: refer to installation instructions

### Materials

- Base: body and end caps in white lacquered aluminium
- Diffuser: opal polycarbonate
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/UE and amendments

### Colours / Finish

- Finish lacquered white RAL9016

### Wiring

- Supply terminal block: automatic, dual-entry for 1.5 mm<sup>2</sup> conductors

*Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.*



05/01/2024

## Closing

- None (opening secured by special tool)




## Facilities available

- In-line fitting (side running wiring): add the suffix **9801** to the product – example: 301xxxxx **9801**
- Open on the right hand side: add the suffix **9803** to the product – example: 301xxxxx **9803**
- Open on the left hand side: add the suffix **9804** to the product – example: 301xxxxx **9804**



Coté droit ouvert  
Option **9803**

Coté Gauche ouvert  
Option **9804**

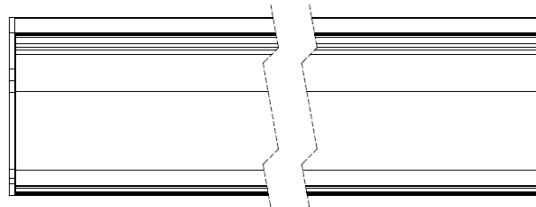

## Tools *(to be ordered separately)*


- Soffite opening tool - code: **98000009**

## Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)

## Dimensions



*Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.*

05/01/2024

## Technical data and order codes

SOFFITE LED							
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length (mm)	Code
Soffite 2 modules LLC900	3000	12	-	1280	107	615	30150300
Soffite 2 modules LLC900	4000	12	-	1330	111	615	30150400
Soffite 2 modules LLC1300	3000	18	-	2180	121	615	30160300
Soffite 2 modules LLC1300	4000	18	-	2270	126	615	30160400
Soffite 3 modules LLC900	3000	14	-	1610	115	915	30170300
Soffite 3 modules LLC900	4000	14	-	1680	120	915	30170400
Soffite 3 modules LLC1300	3000	26	-	3120	120	915	30180300
Soffite 3 modules LLC1300	4000	26	-	3250	125	915	30180400
Soffite 4 modules LLC900	3000	18	-	2260	126	1195	30190300
Soffite 4 modules LLC900	4000	18	-	2350	131	1195	30190400
Soffite 4 modules LLC1300	3000	33	-	4060	123	1195	30200300
Soffite 4 modules LLC1300	4000	33	-	4240	128	1195	30200400
Soffite 5 modules LLC900	3000	26	-	3210	123	1475	30210300
Soffite 5 modules LLC900	4000	26	-	3340	128	1475	30210400
Soffite 5 modules LLC1300	3000	41	-	5120	125	1475	30220300
Soffite 5 modules LLC1300	4000	41	-	5340	130	1475	30220400

SOFFITE LED with Pro detection technical specifications and conditions of use for detection (NOT0410): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0410)							
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length (mm)	Code
Soffite 2 modules LLC900	3000	13	<0,5	1280	98	760	30150312
Soffite 2 modules LLC900	4000	13	<0,5	1330	102	760	30150412
Soffite 2 modules LLC1300	3000	19	<0,5	2180	115	760	30160312
Soffite 2 modules LLC1300	4000	19	<0,5	2270	119	760	30160412
Soffite 3 modules LLC900	3000	15	<0,5	1610	107	1060	30170312
Soffite 3 modules LLC900	4000	15	<0,5	1680	112	1060	30170412
Soffite 3 modules LLC1300	3000	27	<0,5	3120	116	1060	30180312
Soffite 3 modules LLC1300	4000	27	<0,5	3250	120	1060	30180412
Soffite 4 modules LLC900	3000	19	<0,5	2260	119	1340	30190312
Soffite 4 modules LLC900	4000	19	<0,5	2350	124	1340	30190412
Soffite 4 modules LLC1300	3000	34	<0,5	4060	119	1340	30200312
Soffite 4 modules LLC1300	4000	34	<0,5	4240	125	1340	30200412
Soffite 5 modules LLC900	3000	27	<0,5	3210	119	1620	30210312
Soffite 5 modules LLC900	4000	27	<0,5	3340	124	1620	30210412
Soffite 5 modules LLC1300	3000	42	<0,5	5120	122	1620	30220312
Soffite 5 modules LLC1300	4000	42	<0,5	5340	127	1620	30220412

SOFFITE LED with Pro detection + extinction warning technical specifications and conditions of use for detection <a href="http://www.securlite.com">www.securlite.com</a> (NOT0410)							
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length (mm)	Code
Soffite 2 modules LLC900	3000	13	<0,5	1280	98	760	30150314
Soffite 2 modules LLC900	4000	13	<0,5	1330	102	760	30150414
Soffite 2 modules LLC1300	3000	19	<0,5	2180	115	760	30160314
Soffite 2 modules LLC1300	4000	19	<0,5	2270	119	760	30160414
Soffite 3 modules LLC900	3000	15	<0,5	1610	107	1060	30170314
Soffite 3 modules LLC900	4000	15	<0,5	1680	112	1060	30170414
Soffite 3 modules LLC1300	3000	27	<0,5	3120	116	1060	30180314
Soffite 3 modules LLC1300	4000	27	<0,5	3250	120	1060	30180414
Soffite 4 modules LLC900	3000	19	<0,5	2260	119	1340	30190314
Soffite 4 modules LLC900	4000	19	<0,5	2350	124	1340	30190414
Soffite 4 modules LLC1300	3000	34	<0,5	4060	119	1340	30200314
Soffite 4 modules LLC1300	4000	34	<0,5	4240	125	1340	30200414
Soffite 5 modules LLC900	3000	27	<0,5	3210	119	1620	30210314
Soffite 5 modules LLC900	4000	27	<0,5	3340	124	1620	30210414
Soffite 5 modules LLC1300	3000	42	<0,5	5120	122	1620	30220314
Soffite 5 modules LLC1300	4000	42	<0,5	5340	127	1620	30220414

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024

## Technical data and order codes

<b>SOFFITE LED with Pro detection + standby warning</b> <i>technical specifications and conditions of use for detection <a href="http://www.securlite.com">www.securlite.com</a> (NOT0410)</i>							
Designation	CCT (K)	Power (W)	Power in eco mode <sup>(1)</sup> (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length (mm)	Code
Soffite 2 modules LLC900	3000	13	2,6	1280	98	760	30150315
Soffite 2 modules LLC900	4000	13	2,6	1330	102	760	30150415
Soffite 2 modules LLC1300	3000	19	3,1	2180	115	760	30160315
Soffite 2 modules LLC1300	4000	19	3,1	2270	119	760	30160415
Soffite 3 modules LLC900	3000	15	2,8	1610	107	1060	30170315
Soffite 3 modules LLC900	4000	15	2,8	1680	112	1060	30170415
Soffite 3 modules LLC1300	3000	27	3,9	3120	116	1060	30180315
Soffite 3 modules LLC1300	4000	27	3,9	3250	120	1060	30180415
Soffite 4 modules LLC900	3000	19	3,2	2260	119	1340	30190315
Soffite 4 modules LLC900	4000	19	3,2	2350	124	1340	30190415
Soffite 4 modules LLC1300	3000	34	4,9	4060	119	1340	30200315
Soffite 4 modules LLC1300	4000	34	4,9	4240	125	1340	30200415
Soffite 5 modules LLC900	3000	27	3,9	3210	119	1620	30210315
Soffite 5 modules LLC900	4000	27	3,9	3340	124	1620	30210415
Soffite 5 modules LLC1300	3000	42	6,1	5120	122	1620	30220315
Soffite 5 modules LLC1300	4000	42	6,1	5340	127	1620	30220415

<b>SOFFITE LED slave version + extinction warning</b>							
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length (mm)	Code
Soffite 2 modules LLC900	3000	12	<0,5	1280	107	615	30150304
Soffite 2 modules LLC900	4000	12	<0,5	1330	111	615	30150404
Soffite 2 modules LLC1300	3000	18	<0,5	2180	121	615	30160304
Soffite 2 modules LLC1300	4000	18	<0,5	2270	126	615	30160404
Soffite 3 modules LLC900	3000	14	<0,5	1610	115	915	30170304
Soffite 3 modules LLC900	4000	14	<0,5	1680	120	915	30170404
Soffite 3 modules LLC1300	3000	26	<0,5	3120	120	915	30180304
Soffite 3 modules LLC1300	4000	26	<0,5	3250	125	915	30180404
Soffite 4 modules LLC900	3000	19	<0,5	2260	119	1195	30190304
Soffite 4 modules LLC900	4000	19	<0,5	2350	124	1195	30190404
Soffite 4 modules LLC1300	3000	33	<0,5	4060	123	1195	30200304
Soffite 4 modules LLC1300	4000	33	<0,5	4240	128	1195	30200404
Soffite 5 modules LLC900	3000	26	<0,5	3210	123	1475	30210304
Soffite 5 modules LLC900	4000	26	<0,5	3340	128	1475	30210404
Soffite 5 modules LLC1300	3000	41	<0,5	5120	125	1475	30220304
Soffite 5 modules LLC1300	4000	41	<0,5	5340	130	1475	30220404

<b>SOFFITE LED slave version + stand-by warning</b>							
Designation	CCT (K)	Power (W)	Power in eco mode <sup>(1)</sup> (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length (mm)	Code
Soffite 2 modules LLC900	3000	12	2,6	1280	107	615	30150305
Soffite 2 modules LLC900	4000	12	2,6	1330	111	615	30150405
Soffite 2 modules LLC1300	3000	18	3,1	2180	121	615	30160305
Soffite 2 modules LLC1300	4000	18	3,1	2270	126	615	30160405
Soffite 3 modules LLC900	3000	14	2,8	1610	115	915	30170305
Soffite 3 modules LLC900	4000	14	2,8	1680	120	915	30170405
Soffite 3 modules LLC1300	3000	26	3,9	3120	120	915	30180305
Soffite 3 modules LLC1300	4000	26	3,9	3250	125	915	30180405
Soffite 4 modules LLC900	3000	19	3,2	2260	119	1195	30190305
Soffite 4 modules LLC900	4000	19	3,2	2350	124	1195	30190405
Soffite 4 modules LLC1300	3000	33	4,9	4060	123	1195	30200305
Soffite 4 modules LLC1300	4000	33	4,9	4240	128	1195	30200405
Soffite 5 modules LLC900	3000	26	3,9	3210	123	1475	30210305
Soffite 5 modules LLC900	4000	26	3,9	3340	128	1475	30210405
Soffite 5 modules LLC1300	3000	41	6,1	5120	125	1475	30220305
Soffite 5 modules LLC1300	4000	41	6,1	5340	130	1475	30220405

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024

## Technical data and order codes

<b>SOFFITE LED + with Pro detection + radio-control</b> <i>technical specifications and conditions of use for detection <a href="http://www.securlite.com">www.securlite.com</a> (NOT0420)</i>							
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length (mm)	Code
Soffite 2 modules LLC900	3000	13	0,5	1280	98	760	30150316
Soffite 2 modules LLC900	4000	13	0,5	1330	102	760	30150416
Soffite 2 modules LLC1300	3000	19	0,5	2180	115	760	30160316
Soffite 2 modules LLC1300	4000	19	0,5	2270	119	760	30160416
Soffite 3 modules LLC900	3000	15	0,5	1610	107	1060	30170316
Soffite 3 modules LLC900	4000	15	0,5	1680	112	1060	30170416
Soffite 3 modules LLC1300	3000	27	0,5	3120	116	1060	30180316
Soffite 3 modules LLC1300	4000	27	0,5	3250	120	1060	30180416
Soffite 4 modules LLC900	3000	19	0,5	2260	119	1340	30190316
Soffite 4 modules LLC900	4000	19	0,5	2350	124	1340	30190416
Soffite 4 modules LLC1300	3000	34	0,5	4060	119	1340	30200316
Soffite 4 modules LLC1300	4000	34	0,5	4240	125	1340	30200416
Soffite 5 modules LLC900	3000	27	0,5	3210	119	1620	30210316
Soffite 5 modules LLC900	4000	27	0,5	3340	124	1620	30210416
Soffite 5 modules LLC1300	3000	42	0,5	5120	122	1620	30220316
Soffite 5 modules LLC1300	4000	42	0,5	5340	127	1620	30220416

<b>SOFFITE LED + DALI dimmable + switch dimming + standby warning</b>							
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length (mm)	Code
Soffite 2 modules LLC900	3000	12	<0,5	1280	107	615	30150321
Soffite 2 modules LLC900	4000	12	<0,5	1330	111	615	30150421
Soffite 2 modules LLC1300	3000	18	<0,5	2180	121	615	30160321
Soffite 2 modules LLC1300	4000	18	<0,5	2270	126	615	30160421
Soffite 3 modules LLC900	3000	14	<0,5	1610	115	915	30170321
Soffite 3 modules LLC900	4000	14	<0,5	1680	120	915	30170421
Soffite 3 modules LLC1300**	3000	26	<0,5	3120	120	915	30180321
Soffite 3 modules LLC1300**	4000	26	<0,5	3250	125	915	30180421
Soffite 4 modules LLC900	3000	19	<0,5	2260	119	1195	30190321
Soffite 4 modules LLC900	4000	19	<0,5	2350	124	1195	30190421
Soffite 4 modules LLC1300**	3000	33	<0,5	4060	123	1195	30200321
Soffite 4 modules LLC1300**	4000	33	<0,5	4240	128	1195	30200421
Soffite 5 modules LLC900**	3000	26	<0,5	3210	123	1475	30210321
Soffite 5 modules LLC900**	4000	26	<0,5	3340	128	1475	30210421
Soffite 5 modules LLC1300**	3000	41	<0,5	5120	125	1475	30220321
Soffite 5 modules LLC1300**	4000	41	<0,5	5340	130	1475	30220421

(1) : eco mode: operating mode with luminous flux reduced to 10% of nominal.

**Operating instruction :** [www.securlite.com](http://www.securlite.com) (NOT0650)

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024