




ALEANE

Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class 1
- IP: 55
- IK: 11+ / 80 joules
- Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- VK45 wall-mounted, VK45 ceiling-mounted
- CRI: 80
- SDCM (Standard Deviation Colour Matching): 3
- Photobiological hazard: RG0
- Energy class C light source
- Lumen maintenance: L80B10 / over 72,000 hr
- Lumen maintenance: L90B50 / 52,000 hr
- Number of detector switching cycles: 1,000,000 at maximum load.
- Repairable luminaire. Spare parts available on demand
- 5-year guarantee, details of conditions available on securlite.com

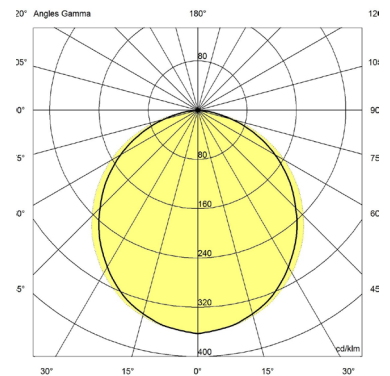

Applications

- Low-profile technical luminaire for indoor and outdoor environments subject to moderate and severe vandalism
- Conditions of use:
 - Models with detection: not recommended for outdoor use
 - Installation positions: refer to installation instructions

Materials

- Rip-out-resistant body in 1 mm anticorrosion-treated steel with polyester powder-coated finish
- Cover in 1.5 mm thick anticorrosion-treated steel with polyester powder-coated finish
- Diffuser: 3 mm opal polycarbonate
- Protected cable entries
- Fixing outside the sealed body
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/CE and amendments

Colours / Finish

- Standard colour: white RAL9003

Wiring

- Supply terminal block: automatic dual-entry for 1.5 mm² conductors, 3 poles for standard versions
- 3 × 20.5 mm Ø cable entry for cable gland

Fixings

- Diffuser: retained by M6 stainless 2-point tamper-proof screws with sealing washers

Facilities available

- Through wiring: add the suffix **9101** to the product code – example: 69xxxxxx **9101**
- Flat Duroflam® diffuser: add the suffix **9413** to the product code – example: 69xxxxxx **9413**
- Anti-graffiti protection: add the suffix **9601** to the product code – example: 69xxxxxx **9601**
- Stainless crosspoint screws (VK54): add the suffix **9702** to the product code – example: 69xxxxxx **9702**
- In-line fitting: add the suffix **9801** to the product code – example: 69xxxxxx **9801**

Tools

(to be ordered separately)

- M6 bit for 2-point tamper-proof screws – code: **98000004**
- Bit-holder screwdriver – code: **98000005**


Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)

Dimensions

Length: corresponding to luminaire power

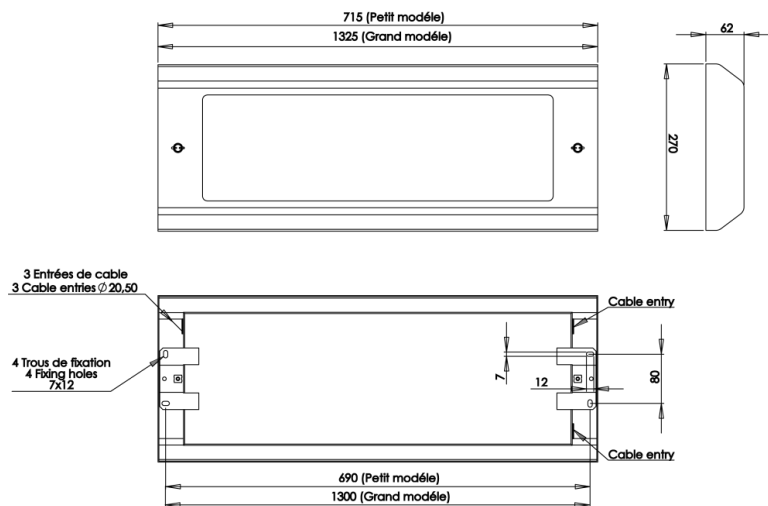

Technical data and order codes

ALEANE LED								
Designation	CCT (K)	Power (W)	Power in standby (W)	Power factor	L (mm)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Code
Aleane 4 modules LED LLC900	3000	17	-	>0,9	715	1900	112	69150300
Aleane 4 modules LED LLC900	4000	17	-	>0,9	715	2000	118	69150400
Aleane 4 modules LED LLC1300	3000	41	-	>0,9	715	4200	102	69160300
Aleane 4 modules LED LLC1300	4000	41	-	>0,9	715	4400	107	69160400
Aleane 8 modules LED LLC900	3000	41	-	>0,9	1325	4400	107	69170300
Aleane 8 modules LED LLC900	4000	41	-	>0,9	1325	4600	112	69170400
Aleane 8 modules LED LLC1300	3000	70	-	>0,9	1325	7300	104	69180300
Aleane 8 modules LED LLC1300	4000	70	-	>0,9	1325	7600	109	69180400

ALEANE LED with Pro detection								
<i>technical specifications and conditions of use for detection : www.securlite.com (NOT0410)</i>								
Designation	CCT (K)	Power (W)	Power in standby (W)	Power factor	L (mm)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Code
Aleane 4 modules LED LLC900	3000	18	<0,5	>0,9	715	1900	106	69150312
Aleane 4 modules LED LLC900	4000	18	<0,5	>0,9	715	2000	111	69150412
Aleane 4 modules LED LLC1300	3000	42	<0,5	>0,9	715	4200	100	69160312
Aleane 4 modules LED LLC1300	4000	42	<0,5	>0,9	715	4400	105	69160412
Aleane 8 modules LED LLC900	3000	42	<0,5	>0,9	1325	4400	105	69170312
Aleane 8 modules LED LLC900	4000	42	<0,5	>0,9	1325	4600	110	69170412
Aleane 8 modules LED LLC1300	3000	71	<0,5	>0,9	1325	7300	103	69180312
Aleane 8 modules LED LLC1300	4000	71	<0,5	>0,9	1325	7600	107	69180412

ALEANE LED DALI dimmable + switch dimming								
<i>technical specifications and conditions of use for dali : www.securlite.com (NOT0880)</i>								
Designation	CCT (K)	Power (W)	Power in standby (W)	Power factor	L (mm)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Code
Aleane 4 modules LED LLC900	3000	18	<0,5	>0,9	715	1900	106	69150321
Aleane 4 modules LED LLC900	4000	18	<0,5	>0,9	715	2000	111	69150421
Aleane 4 modules LED LLC1300	3000	42	<0,5	>0,9	715	4200	100	69160321
Aleane 4 modules LED LLC1300	4000	42	<0,5	>0,9	715	4400	105	69160421
Aleane 8 modules LED LLC900	3000	42	<0,5	>0,9	1325	4400	105	69170321
Aleane 8 modules LED LLC900	4000	42	<0,5	>0,9	1325	4600	110	69170421
Aleane 8 modules LED LLC1300	3000	71	<0,5	>0,9	1325	7300	103	69180321
Aleane 8 modules LED LLC1300	4000	71	<0,5	>0,9	1325	7600	107	69180421

Operating instruction : www.securlite.com (NOT0550)