



DUROPARK

Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198-264 V AC
- Electrical protection class 1
- IP: 65
- IK: 10 / 20 joules
- Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- VK22 ceiling mounted
- CRI: 80
- SDCM (Standard Deviation Colour Matching): 5
- Photobiological hazard: RG0
- Lumen maintenance: L70B50 / 50,000 hours
- Number of detector switching cycles (option 12) : 1,000,000 at maximum load.
- 3-year guarantee, details of conditions available on securlite.com

Applications

- SeaLED luminaire for indoor and outdoor environments subject to moderate vandalism
- Conditions of use :
 - Models with detection: installation indoor only
 - Installation positions: refer to installation instructions

Materials

- Injection-moulded polycarbonate body
- Opal polycarbonate diffuser
- Sealing gaskets
- Stainless-steel fixing clips with secure closure
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/UE and amendments

Colours / Finish

- Paint body RAL7035

Wiring

- 2 × 20 mm Ø threaded cable entries
- Supply terminal block for 1.5 mm² conductors
- 3-pole for standard versions

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024

Closing

- Diffuser: stainless-steel fixing clips with secure closure




Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)

Dimensions

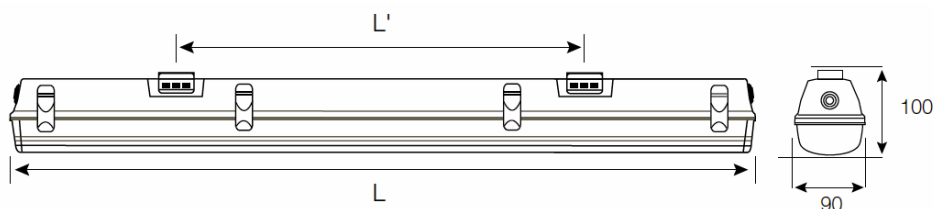

	L	L'
4 x LED	1277	800
5 x LED	1577	1100

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024

Technical data and order codes

DUROPARK LED									
Designation	CCT (K)	Power (W)	Power in stand by (W)	Power factor	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length L (mm)	Length L'(mm)	Code
Duropark LED 4 modules	4000	31	-	>0,9	4400	142	1277	800	78409400
Duropark LED 5 modules	4000	37	-	>0,9	5500	147	1577	1100	78419400

DUROPARK LED with Pro detection <i>technical specifications and conditions for detection (NOT0410) www.securlite.com (NOT0410)</i>									
Designation	CCT (K)	Power (W)	Power in stand by (W)	Power factor	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length L (mm)	Length L'(mm)	Code
Duropark LED 4 modules	4000	32	<0,5	>0,9	4400	138	1277	800	78409412
Duropark LED 5 modules	4000	38	<0,5	>0,9	5500	145	1577	1100	78419412

DUROPARK LED with detection <i>technical specifications and conditions for detection (NOT0155) www.securlite.com (NOT0155)</i>									
Designation	CCT (K)	Power (W)	Power in stand by (W)	Power factor	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length L (mm)	Length L'(mm)	Code
Duropark LED 4 modules	4000	32	<0,5	>0,9	4400	138	1277	800	78409410
Duropark LED 5 modules	4000	38	<0,5	>0,9	5500	145	1577	1100	78419410

DUROPARK LED DALI dimmable + switch dimming + standby warning									
Designation	CCT (K)	Power (W)	Power in stand by (W)	Power factor	Luminaire output (lm)	Luminaire efficacy (lm/W)	Length L (mm)	Length L'(mm)	Code
Duropark LED 4 modules	4000	31	<0,5	>0,9	4400	142	1277	800	78409421
Duropark LED 5 modules	4000	37	<0,5	>0,9	5500	147	1577	1100	78419421

Operating instruction : www.securlite.com (NOT0740)