



## TITAN VIDEO (A45 – A30)

### Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class 1
- IP: 65
- IK: 11++ / 120 joules
- Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- VK66 angle mounted
- CRI: 80
- SDCM (Standard Deviation Colour Matching): 3
- Photobiological hazard: RG0
- Energy class C light source
- Lumen maintenance: L80B10 / over 72,000 hours
- Lumen maintenance: L90B50 / 52,000 hours
- Number of detector switching cycles: 1,000,000 at maximum load.
- Repairable luminaire. Spare parts available on demand
- 5-year guarantee, details of conditions available on [securlite.com](http://securlite.com)

### Applications

- Decorative luminaire for indoor or outdoor environments subject to moderate and severe vandalism
- Luminaire complete with separate housing on the side for a built-in video camera, with removable front panel secured by two 2-hole [pig-nose] vandal-resistant screws (**Video equipment not included!**)
- Conditions of use:
  - Models with detection: not recommended for outdoor use
  - Installation positions: refer to installation instructions

### Materials

- Base: 1 mm thick zinc-plated steel, frame 2 mm thick ZP steel
- Diffuser: opal polycarbonate
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/CE and amendments

### Colours / Finish

- Standard colour: graphite grey RAL7016SG
- Abrasion-resistant polyester paint finish, withstands polluting chemical elements

*Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.*

1

05/01/2024

## Wiring

- Sliding, plug-in gear tray
- Supply terminal block: automatic, dual-entry, for 3 × 1.5 mm<sup>2</sup> conductors
- 2 side cable entries for M20 cable glands (not supplied)

## Fixings

- Diffuser: retained by M6 stainless 2-point tamper-proof screws with sealing washers

## Accessories

(to be ordered separately)

- M6 bit for 2-point tamper-proof screws – code: **98000004**
- M6 bit-holder screwdriver – code: **980000005**

## Facilities available

- Flat Duroflam® diffuser (IK11+ 80J): add the suffix **9413** to the product code – example: 53xxxxxx **9413**
- Flat PC diffuser (IK11+ 80J): add the suffix **9415** to the product code – example: 53xxxxxx **9415**
- Anti-graffiti protection: add the suffix **9601** to the product code – example: 53xxxxxx **9601**


## Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)


## Dimensions

Titan A45

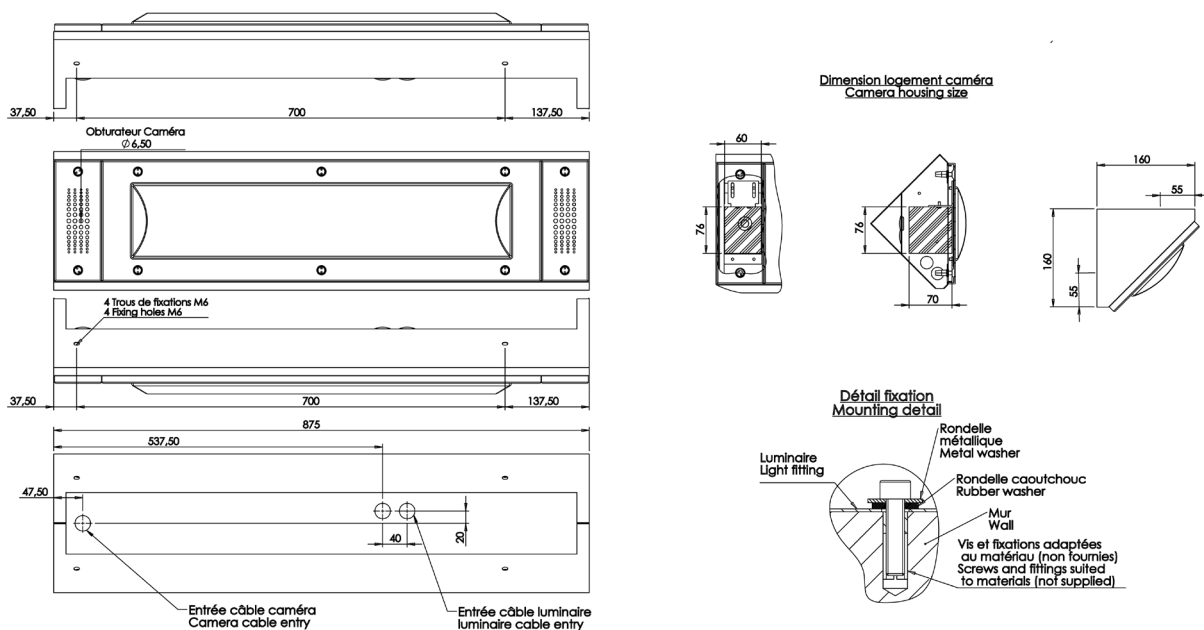

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

### Titan A30

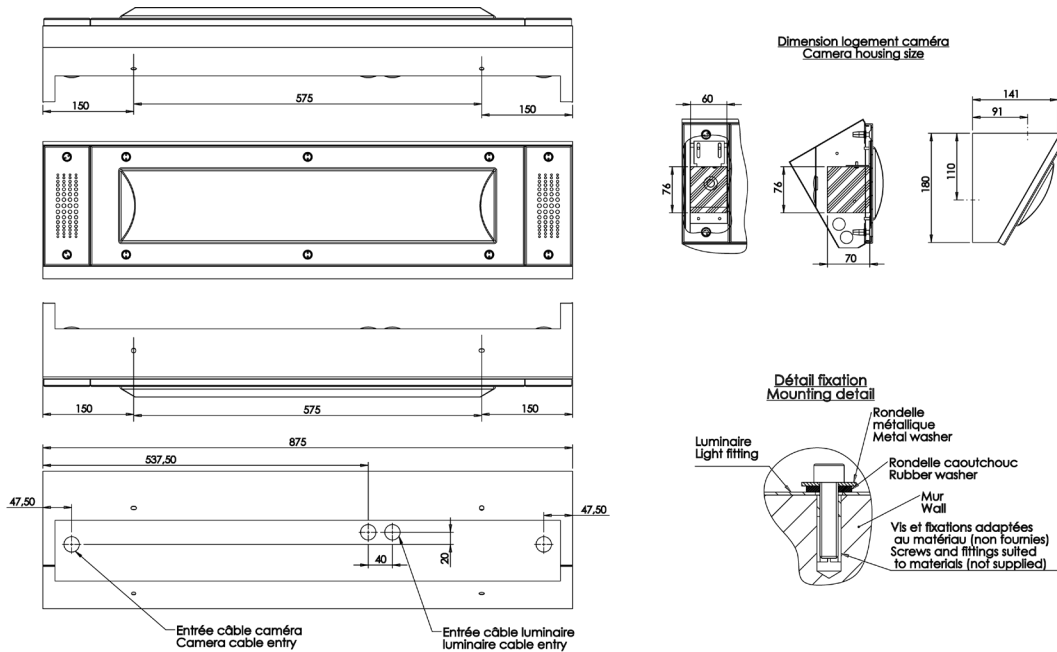

### Technical data and order codes

TITAN VIDEO SURVEILLANCE LED									
Designation	CCT (K)	Power (W)	Power in standby (W)	Power factor	Length L (mm)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Code TITAN A45	Code TITAN A30
2 modules LED LLC1300	3000	21	-	>0,9	875	1930	92	60611300	61611300
2 modules LED LLC1300	4000	21	-	>0,9	875	2010	96	60611400	61611400
4 modules LED LLC1300	3000	43	-	>0,9	875	3910	91	60631300	61631300
4 modules LED LLC1300	4000	43	-	>0,9	875	4080	95	60631400	61631400

TITAN VIDEO SURVEILLANCE LED with Pro detection + standby warning <i>technical specifications and conditions of use for detection <a href="http://www.securlite.com">www.securlite.com</a> (NOT0410)</i>									
Designation	CCT (K)	Power (W)	Power in standby (W)	Power factor	Length L (mm)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Code TITAN A45	Code TITAN A30
2 modules LED LLC1300	3000	22	<0,5	>0,9	875	1930	88	60611315	61611315
2 modules LED LLC1300	4000	22	<0,5	>0,9	875	2010	92	60611415	61611415
4 modules LED LLC1300	3000	44	<0,5	>0,9	875	3910	89	60631315	61631315
4 modules LED LLC1300	4000	44	<0,5	>0,9	875	4080	93	60631415	61631415

TITAN VIDEO SURVEILLANCE LED + DALI dimmable + switch dimming + standby warning									
Designation	CCT (K)	Power (W)	Power in standby (W)	Power factor	Length L (mm)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Code TITAN A45	Code TITAN A30
2 modules LED LLC1300	3000	22	<0,5	>0,9	875	1930	88	60611321	61611321
2 modules LED LLC1300	4000	22	<0,5	>0,9	875	2010	92	60611421	61611421
4 modules LED LLC1300	3000	44	<0,5	>0,9	875	3910	89	60631321	61631321
4 modules LED LLC1300	4000	44	<0,5	>0,9	875	4080	93	60631421	61631421

Operating instruction : [www.securlite.com](http://www.securlite.com) (NOT0560)

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.