



## EFFICE STAIRWAYS

### Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class 2
- IP: 55
- IK: 10 / 20 joules
- CRI: 80
- Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- VK25 ceiling-mounted
- SDCM (Standard Deviation Colour Matching): 3
- Photobiological hazard: RG0
- Energy class C light source
- Lumen maintenance: L80B10 / over 72,000 hours
- Number of detector switching cycles: 1,000,000 at maximum load.
- Repairable luminaire. Spare parts available on demand
- 5-year guarantee, details of conditions available on [securlite.com](http://securlite.com)

### Applications

- Architectural luminaire for indoor environments subject to moderate vandalism
- Installation positions: refer to installation instructions

### Materials

- Recycled polycarbonate base
- Polycarbonate skirt
- Clear polycarbonate diffuser + optics
- Internal polycarbonate reflector
- Sealing gasket
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/UE and amendments

### Colours / Finish

- Standard ring colour: through-coloured white RAL9003 or traffic grey RAL7043

### Wiring

- 2 × 20.5 mm Ø cable entry for cable gland
- Knockout for 1 side cable entry
- Supply terminal block: automatic, dual-entry, for 1.5 mm<sup>2</sup> conductors

*Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.*

05/01/2024

## Fixings

- Diffuser closed using 4 × M5 stainless captive fixing screws with 2-point tamper-proof heads

## Facilities available

- Stainless crosspoint screws: add the suffix **9702** to the product code – example: 201xxxxx **9702**

## Tools *(to be ordered separately)*


- M5 bit for 2-point tamper-proof screws – code: **98000003**
- Bit-holder screwdriver – code: **980000005**
- Remote control (radio-control version) – code: **98000010**

## Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)

## Dimensions

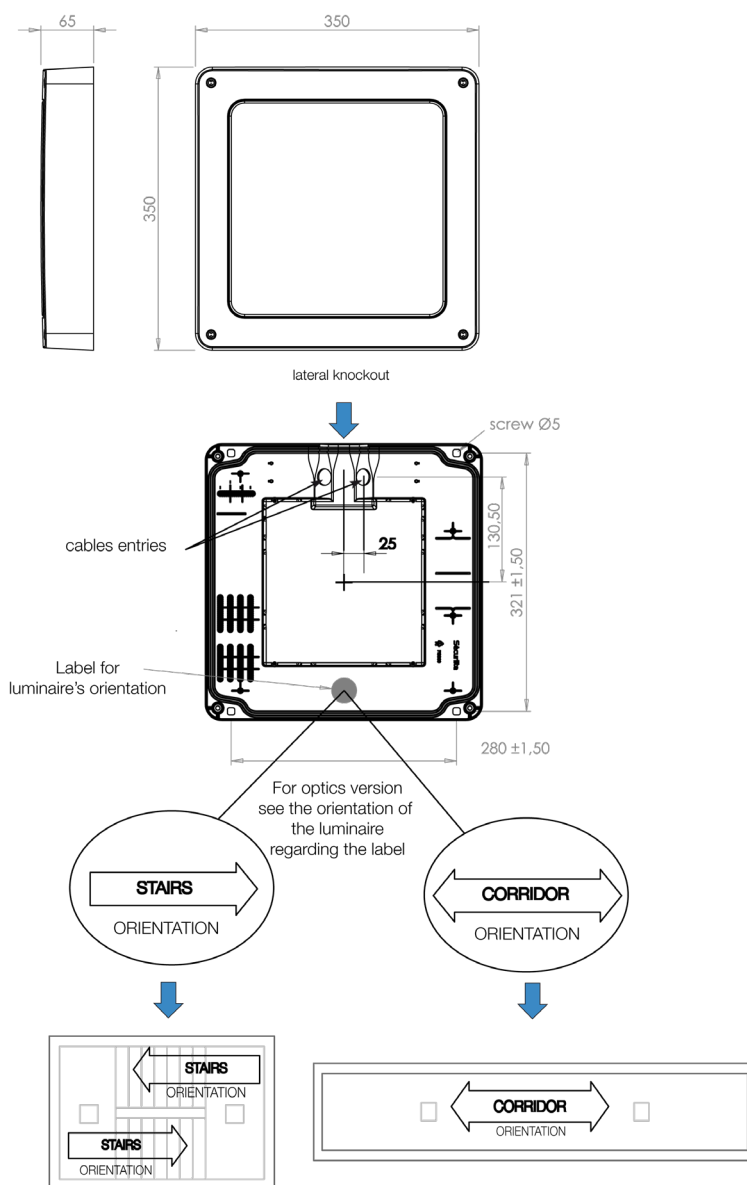

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

### Technical data and order codes

EFFICE for stairways (ceiling mounted only)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	20	-	2400	120	20120300	20121300
Effice for stairways	4000	20	-	2550	128	20120400	20121400
Effice for stairways "plus"	3000	27	-	3300	122	20130300	20131300
Effice for stairways "plus"	4000	27	-	3400	126	20130400	20131400

EFFICE for stairways (ceiling mounted only) DALI dimmable + switch dimming technical specifications and conditions of use (NOT0880): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0880)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	21	<0,5	2400	114	20120321	20121321
Effice for stairways	4000	21	<0,5	2550	121	20120421	20121421
Effice for stairways "plus"***	3000	28	<0,5	3300	118	20130321	20131321
Effice for stairways "plus"***	4000	28	<0,5	3400	121	20130421	20131421

EFFICE for stairways (ceiling mounted only) slave version + extinction or stand-by warning technical specifications and conditions of use for detection (NOT0435): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0435)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	20	<0,5	2400	120	20120303	20121303
Effice for stairways	4000	20	<0,5	2550	128	20120403	20121403
Effice for stairways "plus"	3000	28	<0,5	3300	118	20130303	20131303
Effice for stairways "plus"	4000	28	<0,5	3400	121	20130403	20131403

EFFICE for stairways (ceiling mounted only) + with detection technical specifications and conditions of use for detection (NOT0400): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0400)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	20	<0,5	2400	120	20120311	20121311
Effice for stairways	4000	20	<0,5	2550	128	20120411	20121411
Effice for stairways "plus"	3000	28	<0,5	3300	118	20130311	20131311
Effice for stairways "plus"	4000	28	<0,5	3400	121	20130411	20131411

EFFICE for stairways (ceiling mounted only) + with Pro detection + Extinction or standby warning technical specifications and conditions of use for detection (NOT0425): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0425)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	21	<0,5	2400	114	20120313	20121313
Effice for stairways	4000	21	<0,5	2550	121	20120413	20121413
Effice for stairways "plus"	3000	28	<0,5	3300	118	20130313	20131313
Effice for stairways "plus"	4000	28	<0,5	3400	121	20130413	20131413

EFFICE for stairways (ceiling mounted only) + with Pro detection + radio-control technical specifications and conditions of use for detection (NOT0420): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0420)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	21	0,5	2400	114	20120316	20121316
Effice for stairways	4000	21	0,5	2550	121	20120416	20121416
Effice for stairways "plus"	3000	28	<0,5	3300	118	20130316	20131316
Effice for stairways "plus"	4000	28	<0,5	3400	121	20130416	20131416

EFFICE for stairways (ceiling mounted only) + with Pro detection + extinction or standby warning + radio-control technical specifications and conditions of use for detection (NOT0430): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0430)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	21	0,5	2400	114	20120317	20121317
Effice for stairways	4000	21	0,5	2550	121	20120417	20121417
Effice for stairways "plus"	3000	28	<0,5	3300	118	20130317	20121317
Effice for stairways "plus"	4000	28	<0,5	3400	121	20130417	20121417

EFFICE for stairways (ceiling mounted only) slave version + extinction or stand-by warning + radio-control technical specifications and conditions of use for detection (NOT0440): <a href="http://www.securlite.com">www.securlite.com</a> (NOT0440)							
Designation	CCT (K)	Power (W)	Power in stand-by(W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey
Effice for stairways	3000	21	<0,5	2400	114	20120307	20121307
Effice for stairways	4000	21	<0,5	2550	121	20120407	20121407
Effice for stairways "plus"	3000	28	<0,5	3300	118	20130307	20131307
Effice for stairways "plus"	4000	28	<0,5	3400	121	20130407	20131407

### Operating instruction : [www.securlite.com](http://www.securlite.com) (NOT0500)

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.