

## Features

- Input voltage : 220-240 V AC, 50/60 Hz
- Input voltage range : 198-264 V AC
- Electrical protection class II
- IP : 55
- IK : 10 / 20 joules
- Incandescent wire test 850 °C / 30 s
- Rated ambient temperature: 25° C
- Operating temperature range : -25 °C ... +25 °C
- VK25 surface mounted, VK25 ceiling mounted
- CRI: 80
- SDCM (Standard Deviation Colour Matching): 3
- Photobiological hazard: RG0
- Energy class C light source
- Lumen maintenance: L80B10 : > 72 000h
- 5-year guarantee, details of conditions available on [securlite.com](http://securlite.com)

## Applications

- Architectural luminaire for environment subject to moderate vandalism
- Conditions of use:
- Installation positions: refer to installation instructions

## Material

- Mount: recycled polycarbonate
- Base: recycled polycarbonate
- Bezel: recycled polycarbonate
- Diffuser: polycarbonate
- RoHS : the products contain no prohibited substances as defined in the European Directive 2011/65/UE and amendments

## Colours / Finish

- Colour: white RAL9003, black RAL9005 or grey RAL7035

## Fixing

- Diffuser: retained by 3 x stainless M5 2-point tamper-proof screws with sealing washers, or pozidriv depending on the version

## Facilities available

- Stainless crosspoint screws: add the suffix **9702** to the product code - (example: 190xxxxx **9702**)

## Tools (to be ordered separately)

- M5 bit for 2-point tamper-proof screws – code : **98000003**
- Bit-holder screwdriver– code : **98000005**


*Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.*

## Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on products)

## Dimensions

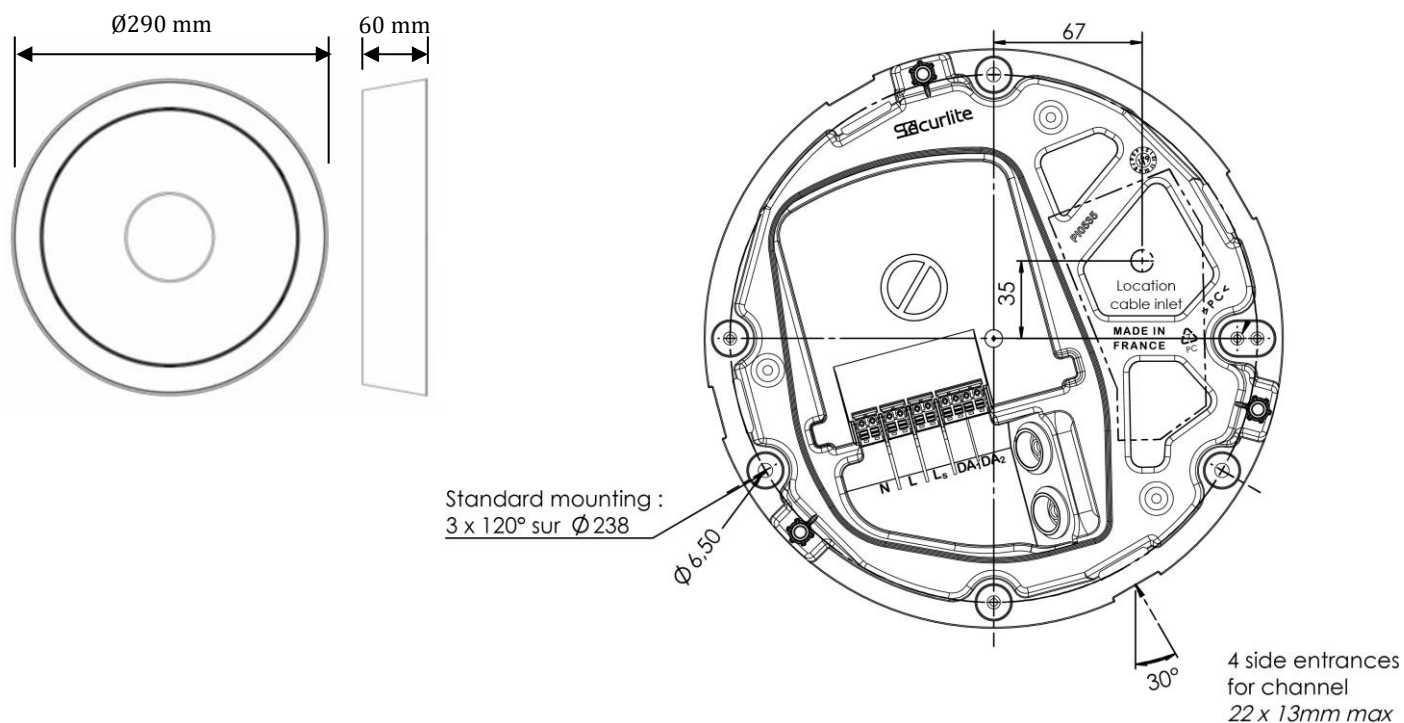

## Features table

Variante	On-off	Extinction warning	Motion detection	Twilight switching	DALI	Switch-Dim	Daisy-chaining	Wireless chaining	Remote-control via smartphone <sup>(3)</sup>	Fault-reporting and remote programming
Luminaire on-off	✓									
Luminaire DALI	✓	✓ <sup>(1)</sup>			✓ <sup>(1)</sup>		✓ <sup>(1)</sup>			

(1) Only possible via DALI control.

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

05/01/2024

## Technical data and order codes

CAPTAIN on-off								
Designation	Colour	CCT (K)	Power (W)	Power factor	Power in stand-by (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
CAPTAIN 2000	White	3000	11	0,85	-	1500	136	19010300
CAPTAIN 2000	White	4000	11	0,85	-	1550	141	19010400
CAPTAIN 2600	White	3000	15	0,9	-	1900	127	19020300
CAPTAIN 2600	White	4000	15	0,9	-	1950	130	19020400
CAPTAIN 3600	White	3000	21	0,94	-	2650	126	19030300
CAPTAIN 3600	White	4000	21	0,94	-	2750	131	19030400
CAPTAIN 2000	Grey	3000	11	0,85	-	1400	127	19011300
CAPTAIN 2000	Grey	4000	11	0,85	-	1450	132	19011400
CAPTAIN 2600	Grey	3000	15	0,9	-	1800	120	19021300
CAPTAIN 2600	Grey	4000	15	0,9	-	1850	123	19021400
CAPTAIN 3600	Grey	3000	21	0,94	-	2500	119	19031300
CAPTAIN 3600	Grey	4000	21	0,94	-	2600	124	19031400
CAPTAIN 2000	Black	3000	11	0,85	-	1300	118	19012300
CAPTAIN 2000	Black	4000	11	0,85	-	1350	123	19012400
CAPTAIN 2600	Black	3000	15	0,9	-	1650	110	19022300
CAPTAIN 2600	Black	4000	15	0,9	-	1700	113	19022400
CAPTAIN 3600	Black	3000	21	0,94	-	2300	110	19032300
CAPTAIN 3600	Black	4000	21	0,94	-	2400	114	19032400

CAPTAIN DALI								
Designation	Colour	CCT (K)	Power (W)	Power factor	Power in stand-by (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
CAPTAIN 2000	White	3000	12	0,85	-	1500	125	19010320
CAPTAIN 2000	White	4000	12	0,85	-	1550	129	19010420
CAPTAIN 2600(*)	White	3000	15	0,9	-	1900	127	19020320
CAPTAIN 2600(*)	White	4000	15	0,9	-	1950	130	19020420
CAPTAIN 3600(*)	White	3000	21	0,94	-	2650	126	19030320
CAPTAIN 3600(*)	White	4000	21	0,94	-	2750	131	19030420
CAPTAIN 2000	Grey	3000	12	0,85	-	1400	117	19011320
CAPTAIN 2000	Grey	4000	12	0,85	-	1450	121	19011420
CAPTAIN 2600(*)	Grey	3000	15	0,9	-	1800	120	19021320
CAPTAIN 2600(*)	Grey	4000	15	0,9	-	1850	123	19021420
CAPTAIN 3600	Grey	3000	21	0,94	-	2500	119	19031320
CAPTAIN 3600(*)	Grey	4000	21	0,94	-	2600	124	19031420
CAPTAIN 2000	Black	3000	12	0,85	-	1300	108	19012320
CAPTAIN 2000	Black	4000	12	0,85	-	1350	113	19012420
CAPTAIN 2600	Black	3000	15	0,9	-	1650	110	19022320
CAPTAIN 2600	Black	4000	15	0,9	-	1700	113	19022420
CAPTAIN 3600	Black	3000	21	0,94	-	2300	110	19032320
CAPTAIN 3600	Black	4000	21	0,94	-	2400	114	19032420

Operating instruction : [www.securlite.com](http://www.securlite.com) (NOT0840)

*Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.*

05/01/2024