



BANG ROUND + STANDBY LED

Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class 2
- IP: 55, with silicone gasket
- IK: 11 / 50 joules
- Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- Anti-rip-out skirt, 4 internal fixing points
- VK35 wall-mounted, VK36 ceiling-mounted
- CRI: 80
- SDCM (Standard Deviation Colour Matching): 5
- Photobiological hazard: RG0
- Energy class C light source
- Lumen maintenance: L80B10 / 72,000 hours
- Repairable luminaire. Spare parts available on demand
- 5-year guarantee, details of conditions available on [securlite.com](https://www.securlite.com)

Applications

- Architectural luminaire for indoor and outdoor environments subject to moderate vandalism
- Conditions of use:
 - Installation positions: refer to installation instructions

Materials

- Base: re-inforced polyamide
- Diffuser: opal polycarbonate
- Screw washers: through-coloured polycarbonate
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/UE amendments

Colours / Finish

- Standard base colours: through-coloured white RAL9003
- Screw washers: white RAL9003

Wiring

- Supply terminal block: automatic dual-entry for 1.5 mm² conductors
- Second separate power supply terminal for LED standby
- 1 × 20.5 mm Ø cable entry + 1 knockout × 20.5 mm Ø cable entry for cable gland

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.

Fixings

- Diffuser closed using 3 × M5 stainless fixing screws with 2-point tamper-proof heads and captive washers


Tools (to be ordered separately)

- M5 bit for 2-point tamper-proof screws – code: **98000003**
- Bit-holder screwdriver – code: **98000005**

Approvals

- Certificates available:
- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)

Dimensions

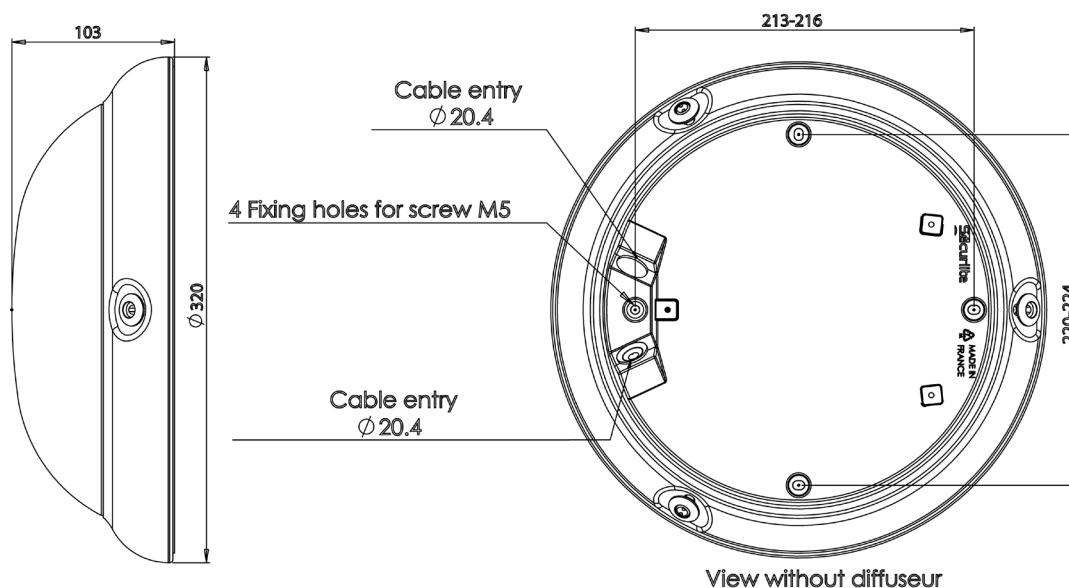

Technical data and order codes

BANG ROUND + Standby LED							
Designation	CCT (K)	Power (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Standby LED power (W)	Standby output (lm)	White
Bang Round 1200	4000	8,9	1050	118	3,3	170	156004009301
Bang Round 1800	4000	13	1500	115	3,3	170	156104009301
Bang Round 2400	4000	18	2100	117	3,3	170	156204009301
Bang Round 3000	4000	20	2500	125	3,3	170	156404009301

Operating instruction : www.securlite.com (NOT0510)

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering.