



RONDO / RONDINO TWILIGHT CELL 70 lux

Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class 1
- IP: 66
- IK: 11++ / 120 joules
- Incandescent wire test 850° / 30 s
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- Anti-rip-out skirt, 4 internal fixing points
- VK55 surface mounted, VK56 ceiling mounted
- CRI: 80
- SDCM (Standard Deviation Colour Matching): 3
- Photobiological hazard: RG0
- Energy class C light source
- Lumen maintenance: L80B10 / 72,000 hours
- Twilight cell 70 lux
- Repairable luminaire. Spare parts available on demand
- 5-year guarantee, details of conditions available on securlite.com

Applications

- Decorative luminaire for indoor, outdoor, subject to moderate and severe vandalism
- Conditions of use:
 - Installation positions: refer to installation instructions

Materials

- Marine-grade die-cast aluminium base
- Diffuser: opal polycarbonate
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/UE and amendments

Colours / Finish

- Colour: matt black RAL 9005, grey aluminium RAL 9006, matt white RAL 9016
- Abrasion-resistant polyester paint finish, withstands chemical elements and pollutants

Wiring

- Supply terminal block: automatic, dual-entry, for 1.5 mm² conductors
- 2 × 20.5 mm Ø cable entry for cable gland

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering. 1

05/01/2024

Technical data sheet

RONDO/RONDINO twilight cell 70 lux - FT0345

Fixings

- Diffuser: retained by 3 × M5 stainless 2-point tamper-proof screws with sealing washers

Facilities available

- Standard screws (VK54): add the suffix **9702** to the product code – example: 252xxxxx **9702**

Tools

(to be ordered separately)

- M5 bit for 2-point tamper-proof screws – code: **98000003**
- M5 bit-holder screwdriver – code: **980000005**


Approvals

Certificates available:


- CE certificate (as per EN60598-1 / 2-1 / 2-2)
- Incandescent Wire Test certificate (depending on product)

Dimensions

RONDO :

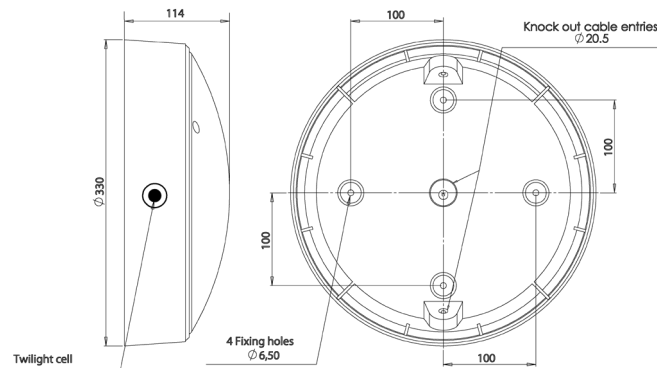

RONDINO :

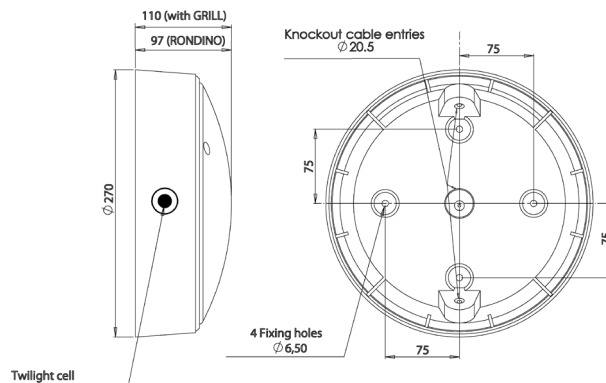

Technical and dimensional data are given for information only and may be modified at any time without notice. Please enquire before ordering. 2

05/01/2024

Technical data sheet

RONDO/RONDINO twilight cell 70 lux - FT0345

Technical data and order codes

RONDO								
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey	Black
Rondo 1800	3000	12	-	1500	125	25200330	25201330	25202330
Rondo 1800	4000	12	-	1550	129	25200430	25201430	25202430
Rondo 2400	3000	17	-	2050	121	25230330	25231330	25232330
Rondo 2400	4000	17	-	2150	126	25230430	25231430	25232430
Rondo 3000	3000	20	-	2450	123	25220330	25221330	25222330
Rondo 3000	4000	20	-	2550	128	25220430	25221430	25222430

Operating instruction: www.securlite.com (NOT0545)

Technical data and order codes

RONDINO								
Designation	CCT (K)	Power (W)	Power in stand-by (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	White	Grey	Black
Rondino 1200	3000	8,9	-	850	96	25610330	25611330	25612330
Rondino 1200	4000	8,9	-	900	101	25610430	25611430	25612430
Rondino 2000	3000	13	-	1400	108	25600330	25601330	25602330
Rondino 2000	4000	13	-	1450	112	25600430	25601430	25602430
Rondino 3000	3000	20	-	2000	100	25620330	25621330	25622330
Rondino 3000	4000	20	-	2100	105	25620430	25621430	25622430

Operating instruction: www.securlite.com (NOT0525)