



VOILA DURABLE

Features

- Input voltage: 220–240 V AC, 50/60 Hz
- Input voltage range: 198–264 V AC
- Electrical protection class : II
- IP : 65 with silicone gasket
- IK : 10 / 20 joules
- ERP/ IGH : Incandescent wire test 850 °C / 30 s
- Rated ambient operating temperature: 25 °C
- Operating temperature range : -20 °C ... +35 °C
- Anti-rip-out skirt, 4 internal fixing points
- VK26 wall-mounted, VK26 ceiling-mounted
- CRI: 80
- SDCM (Standard Deviation Colour Matching): 3
- Photobiological hazard: RG0
- Energy class C light source
- Lumen maintenance: L80B10 / 100 000 hours
- Number of detector switching cycles: 1,000,000 at maximum load.
- Repairable luminaire. Spare parts available on demand
- 8-year guarantee, details of conditions available on securlite.com

Applications

- Decorative luminaire for indoor and outdoor environments subject to moderate vandalism
- Conditions of use:
 - Models with detection: suitable for indoor use
 - Installation positions: refer to installation instructions

Materials

- Base: recycled polycarbonate
- Diffuser: opal polycarbonate
- RoHS: the products contain no prohibited substances as defined in the European Directive 2011/65/UE and amendments

Colours / Finish

- Standard base colours: white RAL9003, black RAL9005, grey RAL7035
- Screw covers: white RAL9003, black RAL9005, grey RAL7035

Wiring

- Supply terminal block: automatic dual-entry for 1.5 mm² conductors
- 1 × 20,5 mm Ø cable entry + 1 knockout × 20,5 mm Ø cable entry for cable gland
- Side cable entries for plastic conduit for renovation

Fixings

- Standard versions use M5 stainless cross-point diffuser fixing screws (VK24)
- Vandal-resistant versions use M5 stainless 2-point tamper-proof diffuser fixing screws
- Captive diffuser screws

Facilities available

- Stainless crosspoint screws: add the suffix **9702** to the product code – example: 104xxxxx **9702**
- White screw cover RAL9003 code: **98100012**
- Grey screw cover RAL7035 code: **98100011**
- Black screw cover RAL9005 code: **98100003**

Accessories

(to be ordered separately)


- M5 bit for 2-point tamper-proof screws – code: **98000003**
- Remote control (radio-control version) – code: **98000010**
- Bit-holder screwdriver – code: **98000005**

Approvals

Certificates available:

- CE certificate (as per EN60598-1 / 2-1)
- Incandescent Wire Test certificate (depending on product)
- EPD available for ON/OFF version : <https://register.pep-ecopassport.org>
- EPD available for Controllable version : <https://register.pep-ecopassport.org>

Dimensions

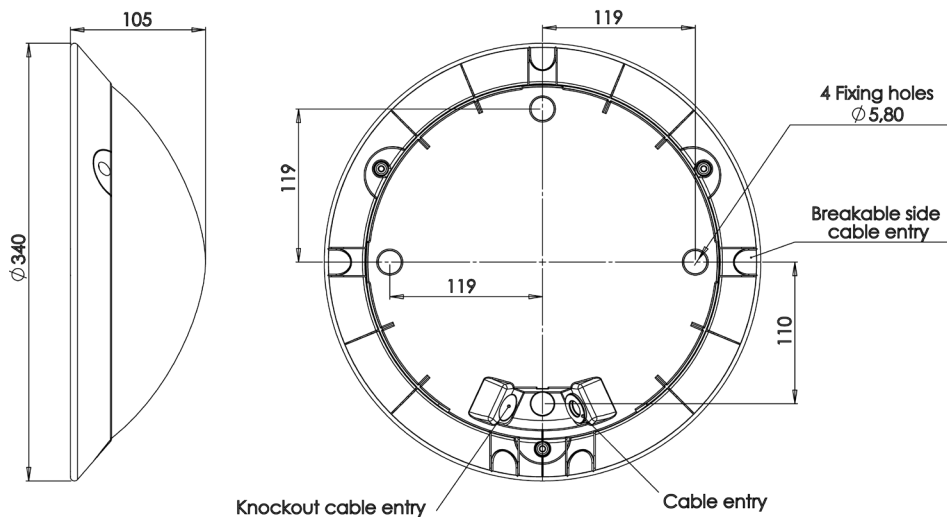

Technical data and order codes

VOILA DURABLE on-off									
Designation	Colour	CCT (K)	Power (W)	Driving current (mA)	Power factor	Power in standby (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Reference
VOILA DURABLE 2100	White	3000	14	350	0,85	-	2048	146	10510300
VOILA DURABLE 2425*	White	3000	16	400	0,87	-	2324	145	
VOILA DURABLE 2100	White	4000	14	350	0,85	-	2133	152	10510400
VOILA DURABLE 2425*	White	4000	16	400	0,87	-	2422	151	
VOILA DURABLE 2100	Grey	3000	14	350	0,85	-	1981	141	10513300
VOILA DURABLE 2425*	Grey	3000	16	400	0,87	-	2248	141	
VOILA DURABLE 2100	Grey	4000	14	350	0,85	-	2063	147	10513400
VOILA DURABLE 2425*	Grey	4000	16	400	0,87	-	2342	146	
VOILA DURABLE 2100	Black	3000	14	350	0,85	-	1905	136	10512300
VOILA DURABLE 2425*	Black	3000	16	400	0,87	-	2162	135	
VOILA DURABLE 2100	Black	4000	14	350	0,85	-	1984	142	10512400
VOILA DURABLE 2425*	Black	4000	16	400	0,87	-	2252	141	

VOILA DURABLE with detection									
<i>technical specifications and conditions for detection www.securlite.com (NOT0400)</i>									
Designation	Colour	CCT (K)	Power (W)	Driving current (mA)	Power factor	Power in standby (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Reference
VOILA DURABLE 2100	White	3000	15	350	0,84	0,44	2019	135	10510311
VOILA DURABLE 2425*	White	3000	17	400	0,87	0,44	2285	134	
VOILA DURABLE 2100	White	4000	15	350	0,84	0,44	2102	140	10510411
VOILA DURABLE 2425*	White	4000	17	400	0,87	0,44	2380	140	
VOILA DURABLE 2100	Grey	3000	15	350	0,84	0,44	1952	130	10513311
VOILA DURABLE 2425*	Grey	3000	17	400	0,87	0,44	2209	130	
VOILA DURABLE 2100	Grey	4000	15	350	0,84	0,44	2033	136	10513411
VOILA DURABLE 2425*	Grey	4000	17	400	0,87	0,44	2302	135	
VOILA DURABLE 2100	Black	3000	15	350	0,84	0,44	1877	125	10512311
VOILA DURABLE 2425*	Black	3000	17	400	0,87	0,44	2125	125	
VOILA DURABLE 2100	Black	4000	15	350	0,84	0,44	1955	130	10512411
VOILA DURABLE 2425*	Black	4000	17	400	0,87	0,44	2214	130	

VOILA DURABLE with Pro detection + Extinction or standby warning									
<i>technical specifications and conditions for detection www.securlite.com (NOT0425)</i>									
Designation	Colour	CCT (K)	Power (W)	Driving current (mA)	Power factor	Power in standby (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Reference
VOILA DURABLE 2100	White	3000	15	350	0,84	0,44	2019	135	10510313
VOILA DURABLE 2425*	White	3000	17	400	0,87	0,44	2285	134	
VOILA DURABLE 2100	White	4000	15	350	0,84	0,44	2102	140	10510413
VOILA DURABLE 2425*	White	4000	17	400	0,87	0,44	2380	140	
VOILA DURABLE 2100	Grey	3000	15	350	0,84	0,44	1952	130	10513313
VOILA DURABLE 2425*	Grey	3000	17	400	0,87	0,44	2209	130	
VOILA DURABLE 2100	Grey	4000	15	350	0,84	0,44	2033	136	10513413
VOILA DURABLE 2425*	Grey	4000	17	400	0,87	0,44	2302	135	
VOILA DURABLE 2100	Black	3000	15	350	0,84	0,44	1877	125	10512313
VOILA DURABLE 2425*	Black	3000	17	400	0,87	0,44	2125	125	
VOILA DURABLE 2100	Black	4000	15	350	0,84	0,44	1955	130	10512413
VOILA DURABLE 2425*	Black	4000	17	400	0,87	0,44	2214	130	

Technical data and order codes

VOILA DURABLE with Pro detection + radio-control									
<i>technical specifications and conditions for detection www.securlite.com (NOT0420)</i>									
Designation	Colour	CCT (K)	Power (W)	Driving current (mA)	Power factor	Power in standby (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Reference
VOILA DURABLE 2100	White	3000	15	350	0,84	0,44	2019	135	10510316
VOILA DURABLE 2425*	White	3000	17	400	0,87	0,44	2285	134	
VOILA DURABLE 2100	White	4000	15	350	0,84	0,44	2102	140	10510416
VOILA DURABLE 2425*	White	4000	17	400	0,87	0,44	2380	140	
VOILA DURABLE 2100	Grey	3000	15	350	0,84	0,44	1952	130	10513316
VOILA DURABLE 2425*	Grey	3000	17	400	0,87	0,44	2209	130	
VOILA DURABLE 2100	Grey	4000	15	350	0,84	0,44	2033	136	10513416
VOILA DURABLE 2425*	Grey	4000	17	400	0,87	0,44	2302	135	
VOILA DURABLE 2100	Black	3000	15	350	0,84	0,44	1877	125	10512316
VOILA DURABLE 2425*	Black	3000	17	400	0,87	0,44	2125	125	
VOILA DURABLE 2100	Black	4000	15	350	0,84	0,44	1955	130	10512416
VOILA DURABLE 2425*	Black	4000	17	400	0,87	0,44	2214	130	


VOILA DURABLE with Pro detection + extinction or standby warning + radio-control									
<i>technical specifications and conditions for detection www.securlite.com (NOT0430)</i>									
Designation	Colour	CCT (K)	Power (W)	Driving current (mA)	Power factor	Power in standby (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Reference
VOILA DURABLE 2100	White	3000	16	350	0,91	<0,5	2019	126	10510317
VOILA DURABLE 2425*	White	3000	18	400	0,92	<0,5	2285	127	
VOILA DURABLE 2100	White	4000	16	350	0,91	<0,5	2102	131	10510417
VOILA DURABLE 2425*	White	4000	18	400	0,92	<0,5	2380	132	
VOILA DURABLE 2100	Grey	3000	16	350	0,91	<0,5	1955	122	10513317
VOILA DURABLE 2425*	Grey	3000	18	400	0,92	<0,5	2209	123	
VOILA DURABLE 2100	Grey	4000	16	350	0,91	<0,5	2033	127	10513417
VOILA DURABLE 2425*	Grey	4000	18	400	0,92	<0,5	2302	128	
VOILA DURABLE 2100	Black	3000	16	350	0,91	<0,5	1877	117	10512317
VOILA DURABLE 2425*	Black	3000	18	400	0,92	<0,5	2125	118	
VOILA DURABLE 2100	Black	4000	16	350	0,91	<0,5	1955	122	10512417
VOILA DURABLE 2425*	Black	4000	18	400	0,92	<0,5	2214	123	

VOILA DURABLE Dali dimmable + Switch Dimming									
<i>technical specifications and conditions for detection www.securlite.com (NOT0880)</i>									
Designation	Colour	CCT (K)	Power (W)	Driving current (mA)	Power factor	Power in standby (W)	Luminaire output (lm)	Luminaire efficacy (lm/W)	Reference
VOILA DURABLE 2425	White	3000	16	400	0,91	0,15	2324	145	10510321
VOILA DURABLE 2425	White	4000	16	400	0,91	0,15	2422	151	10510421
VOILA DURABLE 2425	Grey	3000	16	400	0,91	0,15	2248	141	10513321
VOILA DURABLE 2425	Grey	4000	16	400	0,91	0,15	2342	146	10513421
VOILA DURABLE 2425	Black	3000	16	400	0,91	0,15	2162	135	10512321
VOILA DURABLE 2425	Black	4000	16	400	0,91	0,15	2252	141	10512421

* Default configuration (for luminaire output changes, please refer to the operating instruction)

Operating instruction : www.securlite.com (NOT0910)

Spare parts code for order : (other parts available on request)

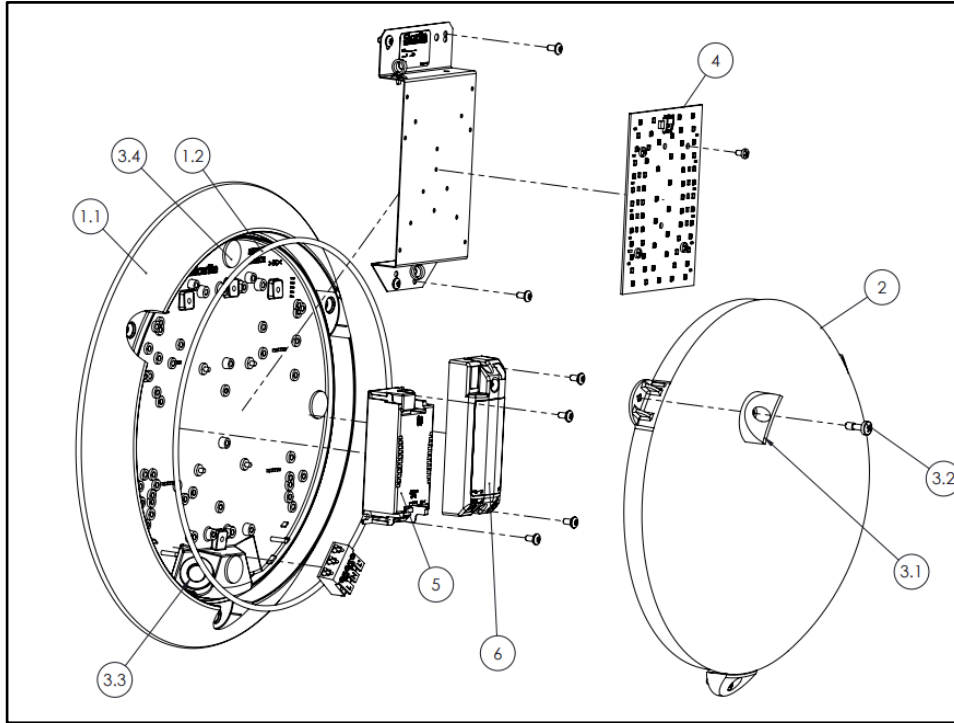

Option	Base (1)			Diffuser (2)	Screw KIT (3)			LED module (4)		Power supply (5)	Sensor (6)
	White	Grey	Black		White	Grey	Black	3000K	4000K		
xxxxxx00	97100071	97100026	97100101	97107000	97105000	97105001	97105002	97102085	97102090	97101110	-
xxxxxx11										97101110	97030000
xxxxxx13										97101115	97030040
xxxxxx16										97101110	97030035
xxxxxx17										97101115	97030045
xxxxxx21										97101120	-