

# ASL / ESL

Surface or flush mounting  
architectural luminaire  
for public areas.



BVCert. 6037554





ASL



ESL





**FEATURES:**


- Architectural luminaire with flush diffuser
- ASL surface-mounting version: body and frame in ZP steel
- Flush-mounting (ESL) version: body and frame in painted 304L stainless steel
- CCT 4000 K, CRI min. 80
- Polyester powder-coated finish
- Opalescent polycarbonate diffuser
- Stainless steel vandal-resistant screws
- Supplied c/w cable seal for surface-mounting (ASL) and flush-mounting (ESL) versions
- RAL 7016 ●

**OPTIONS AVAILABLE ON REQUEST:**


- 3000 K LEDs

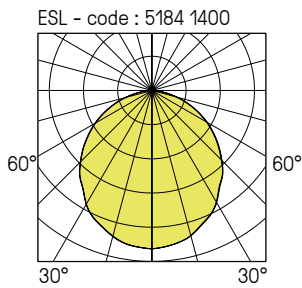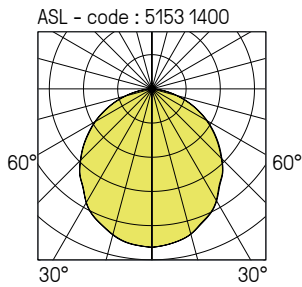

ASL

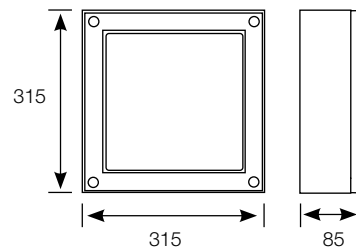

ESL

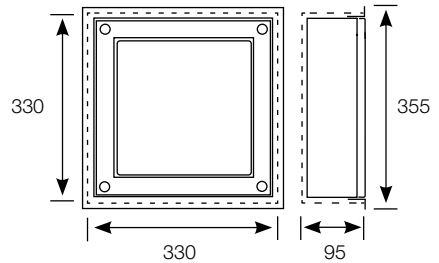

Flush-mounting dimensions:  
330 mm x 330 mm x 95 mm




ESL flush version in stainless steel  
See page 230

Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	ASL	ESL
17 *	1500	88	5154 14--	5184 14--
26	2350	90	5153 14--	5183 14--

Lumen maintenance: L80B10 / 72,000 h

Coding colour temperature 3000 K : example 4000K : 5154 14--  
replace 4 with 3 3000K : 5154 13--

Codification (\* Codification only for power 17 W) :  
replace the two dashes (--) by the corresponding figures:  
example 5154 14--

 Vandal-resistant tool (bit) to be ordered separately  
code : 9800 0004

00 NO DETECTION  
12\* WITH DETECTION PRO  
13\* WITH PRO DETECTION + EXTINCTION OR STANDBY WARNING  
21 DALI DIMMABLE + SWITCH DIMMING + STANDBY WARNING

## Additional options ASL / ESL

Coding:  
add the corresponding suffix to the product code

example : 5154 1400 ----  
9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)  
9413 FLAT DUROFLAM® DIFFUSER  
9601 ANTI-GRAFFITI PROTECTION

ASL  direct 515

ESL  direct 517

## DETAILS





L'ISLE JORDAIN

L'ISLE JORDAIN

gare de l'Isle Jourdain