

BRIKETTE

Small flush-mounting fitting
for access areas and stairways
in outdoor environment.



BVCert. 6037554








FEATURES:

- Small, flush-mount, vandal-resistant luminaire for way marking
- Body and frame in painted 304L stainless steel
- Opalescent polycarbonate diffuser
- Clear pebble polycarbonate diffuser for asymmetrical version
- CCT 4000 K, CRI min. 80
- Stainless steel vandal-resistant screws
- Supplied c/w cable seal
- RAL 7016 ●

OPTIONS AVAILABLE ON REQUEST:

- 3000 K LEDs
- 316L version

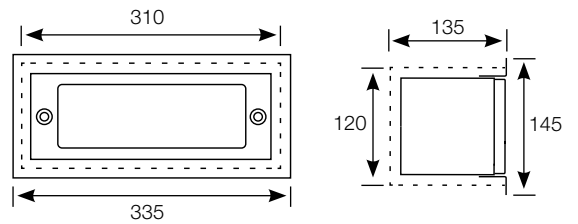

(Minimum installation height: 0.40 m)
 Flush-mounting dimensions:
 310 mm x 120 mm x 135 mm

Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
10	600	60	5102 1400

Lumen maintenance: L80B10 / over 72,000 h
L90B50 / 50,000 h

Coding colour temperature 3000 K :
replace 4 with 3

example 4000K : 5102 1400
3000K : 5102 1300

Vandal-resistant tool (bit) to be ordered separately
code : 9800 0004

BRIKETTE asymetrical

Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
10	700	70	5103 1400

Lumen maintenance: L80B10 / over 72,000 h
L90B50 / 50,000 h

Coding colour temperature 3000 K :
replace 4 with 3

example 4000K : 5103 1400
3000K : 5103 1300

Vandal-resistant tool (bit) to be ordered separately
code : 9800 0004

Additional options BRIKETTE

Coding:
add the corresponding suffix to the product code

example : 51021400 ----
 9601 ANTI-GRAFFITI PROTECTION
 9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)

DETAILS



