

# TITAN

## C95 / E /

## A30 / A45

A comprehensive range  
of steel luminaires designed for premises  
and pedestrian subways  
subject to extreme vandalism.



BVCert. 6037554












## FEATURES:

- Luminaire withstands extreme vandalism
- Wall- (Titan C95) or 45° (Titan A45) or 30° (Titan A30) corner-mounted versions: body and frame in ZP steel
- Flush-mounting version (Titan E): body and frame in painted 304L stainless steel or all-stainless steel in brushed 316L stainless steel. Please enquire.
- CCT 4000 K, CRI min. 80
- Polyester powder-coated finish
- Braced Opalescent polycarbonate diffuser
- Stainless steel vandal-resistant screws
- Wall- and corner-mounting versions supplied c/w nickel-plated brass cable gland
- Flush-mounting version supplied c/w cable seal
- RAL 7016 ●

## OPTIONS AVAILABLE ON REQUEST:

- 3000 K LEDs
- Version with emergency pack
- Standby LED
- Class II
- Trunking (junction panel between luminaires)
- Flat opalescent polycarbonate diffuser (IK11+ 80J)
- Color white : RAL 9003 ○

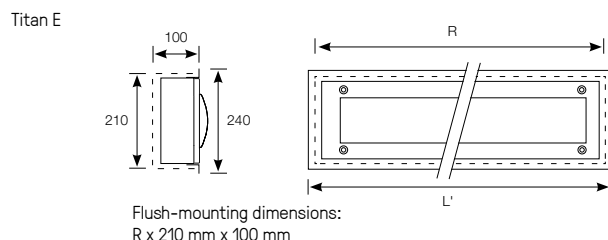


Length (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	Code
720	12	1050	88	6270 14--
	17	1820	109	6272 14--
	21	2010	96	6271 14--
	43	4080	95	6273 14--
1330	17	1850	107	6274 14--
	41	4250	104	6276 14--
	43	4030	94	6275 14--
	70	6930	99	6277 14--


Lumen maintenance: L80B10 / over 72,000 h  
L90B50 / 52,000 h

Coding colour temperature 3000 K: example 4000K: 6270 14--  
replace 4 with 3 3000K: 6270 13--

Coding: replace the two dashes (--) by the corresponding figures:  
example 6270 14--

- 00 NO DETECTION
- 21 DALI DIMMABLE + SWITCH DIMMING
- 12 WITH DETECTION PRO
- 14 WITH DETECTION PRO + EXTINCTION WARNING
- 15 WITH PRO DETECTION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

 Vandal-resistant tool (bit) to be ordered separately  
code : 9800 0004

 Radio remote control to be ordered separately  
code : 9800 0010

### Additional options TITAN C95

Coding:  
add the corresponding suffix to the product code

- example: 6270 1400 ----
- 9101 THROUGH WIRING
  - 9413 FLAT DUROFLAM® DIFFUSER
  - 9415 FLAT OPALESCENT PC DIFFUSER
  - 9601 ANTI-GRAFFITI PROTECTION
  - 9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)

### DETAILS



Aperture length R (mm)	Frame length L' (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
730	760	12	1050	88	6370 14--
		17	1820	109	6372 14--
		21	2010	96	6371 14--
		43	4080	95	6373 14--
1340	1370	17	1850	107	6374 14--
		41	4250	104	6376 14--
		43	4030	94	6375 14--
		70	6930	99	6377 14--


Lumen maintenance: L80B10 / over 72,000 h  
L90B50 / 52,000 h


Coding colour temperature 3000 K:  
replace 4 with 3

example 4000K: 6370 14--  
3000K: 6370 13--

Coding: replace the two dashes (--) by  
the corresponding figures:  
example 6370 14--

- 00 NO DETECTION
- 21 DALI DIMMABLE + SWITCH DIMMING
- 12 WITH DETECTION PRO
- 14 WITH DETECTION PRO + EXTINCTION WARNING
- 15 WITH PRO DETECTION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

 Vandal-resistant tool (bit) to be ordered separately  
code: 9800 0004

 Radio remote control to be ordered separately  
code: 9800 0010

## + DETAILS



Painted 304L stainless steel



Brushed 316L stainless steel




Length (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
720	12	1050	88	6170 14--
	17	1820	109	6172 14--
	21	2010	96	6171 14--
	43	4080	95	6173 14--
1330	17	1850	107	6174 14--
	41	4250	104	6176 14--
	43	4030	94	6175 14--
	70	6930	99	6177 14--


Lumen maintenance: L80B10 / over 72,000 h  
L90B50 / 52,000 h

Coding colour temperature 3000 K : example 4000K : 6170 14--  
replace 4 with 3 3000K : 6170 13--

Coding: replace the two dashes (--) by the corresponding figures:  
example 6170 14--

- 00 NO DETECTION
- 21 DALI DIMMABLE + SWITCH DIMMING
- 12 WITH DETECTION PRO
- 14 WITH DETECTION PRO + EXTINCTION WARNING
- 15 WITH PRO DETECTION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

 Vandal-resistant tool (bit) to be ordered separately  
code: 9800 0004

 Radio remote control to be ordered separately  
code: 9800 0010

### Additional options TITAN A30

Coding:  
add the corresponding suffix to the product code

- example: 6170 1400 ----
- 9101 THROUGH WIRING
  - 9413 FLAT DUROFLAM® DIFFUSER
  - 9415 FLAT OPALESCENT PC DIFFUSER
  - 9601 ANTI-GRAFFITI PROTECTION
  - 9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)

### DETAILS




Length (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	Code
720	12	1050	88	6070 14--
	17	1820	109	6072 14--
	21	2010	96	6071 14--
	43	4080	95	6073 14--
1330	17	1850	107	6074 14--
	41	4250	104	6076 14--
	43	4030	94	6075 14--
	70	6930	99	6077 14--


Lumen maintenance: L80B10 / over 72,000 h  
L90B50 / 52,000 h

Coding colour temperature 3000 K : example 4000K: 6070 14--  
replace 4 with 3 3000K: 6070 13--

Coding: replace the two dashes (--) by the corresponding figures:  
example 6070 14--

- 00 NO DETECTION
- 21 DALI DIMMABLE + SWITCH DIMMING
- 12 WITH DETECTION PRO
- 14 WITH DETECTION PRO + EXTINCTION WARNING
- 15 WITH PRO DETECTION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

 Vandal-resistant tool (bit) to be ordered separately  
code: 9800 0004

 Radio remote control to be ordered separately  
code: 9800 0010

### Additional options TITAN A45

Coding:  
add the corresponding suffix to the product code

- example: 6070 1400 ----
- 9101 THROUGH WIRING
  - 9413 FLAT DUROFLAM® DIFFUSER
  - 9415 FLAT OPALESCENT PC DIFFUSER
  - 9601 ANTI-GRAFFITI PROTECTION
  - 9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)

### DETAILS





0

NOTE  
GAR  
SO



RONNE

RTIE ▶

