


TITAN COMPACT

A highly-compact architectural LED luminaire
for circulation areas and public spaces subject
to vandalism.



BVCert. 6037554

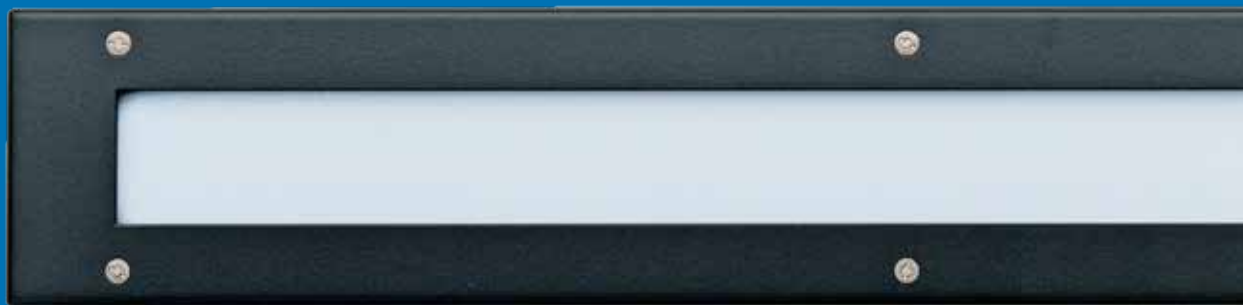

More light, less maintenance: the Titan is the long-life lighting solution that project owners and users of public spaces alike will find re-assuring!

A long service life

With a highly resistant diffuser base and frame, combined with an LED module that lasts for more than 72,000 hours.


Greater savings

Thanks to the LED fittings and lighting management systems: detection, dimming, etc.



**A RANGE OF ELEGANT
TECHNICAL LUMINAIRES
DESIGNED TO WITHSTAND
EXTREME VANDALISM
IN PUBLIC SPACES.**

- 1 Opalescent polycarbonate diffuser (80J)
- 2 Frame anti-corrosion-treated steel with polyester powder-coated
- 3 Stainless steel tamper-resistant screws
- 4 EDPM seal (IP65)
- 5 Base in anti-corrosion-treated steel base with polyester powder-coated

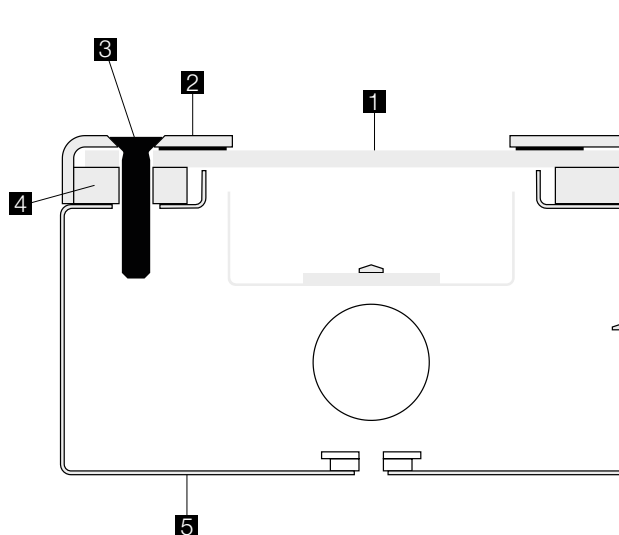





Titan Compact Wall



Titan Compact Angle



Titan Compact E



FEATURES:

- Luminaire withstands extreme vandalism
- Wall or corner mounting versions: body and frame in ZP steel
- Flush-mounting version: body and frame in painted 304L stainless steel
- Polyester powder-coated finish
- Flat opalescent polycarbonate diffuser
- CCT 4000 K, CRI min. 80
- Stainless steel vandal-resistant screws
- Wall- and corner-mounting versions supplied c/w nickel-plated brass cable gland
- Flush-mounting version supplied c/w cable seal
- RAL 7016 ●


OPTIONS AVAILABLE ON REQUEST:

- LED 3000 K
- 316L stainless steel (for wall and corner mounting versions)




LED optics versions on request
(UGR to be confirmed for each lighting project)


Titan Compact Wall
code: 6401 1400




Titan Compact Wall




Titan Compact E
code: 6425 1400




Titan Compact E




Flush-mounting dimensions:
R x 125 mm x 75 mm

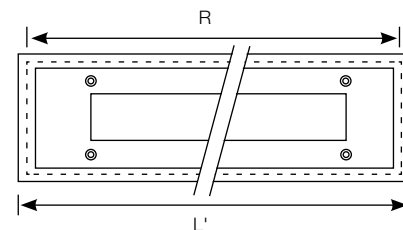

Titan Compact Angle
code: 6411 1400



Titan Compact Angle



TITAN COMPACT wall mounted

220-240 V AC / 50 / 60 Hz



direct 640

Length (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	Code
375*	11	800	73	6401 14--
660	21	1800	86	6402 14--
945	31	2750	89	6403 14--
1230	43	3650	85	6404 14--

Lumen maintenance: L80B10 / over 72,000 h
L90B50 / over 52,000 h

Coding colour temperature 3000 K: example 4000K : 6401 1400
replace 4 with 3 3000K : 6401 1300

Vandal-resistant tool (bit) to be ordered separately
code : 9800 0003

Coding: replace the two dashes (--) by
the corresponding figures:
example 6401 14--
└─ 00 NO DETECTION
└─ 21 DALI DIMMABLE + SWITCH DIMMING (* EXCEPT LENGTH 375 MM)

TITAN COMPACT ANGLE

220-240 V AC / 50 / 60 Hz



direct 641

Length (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	Code
375*	11	800	73	6411 14--
660	21	1800	86	6412 14--
945	31	2750	89	6413 14--
1230	43	3650	85	6414 14--

Lumen maintenance: L80B10 / over 72,000 h
L90B50 / over 52,000 h

Coding colour temperature 3000 K: example 4000K : 6411 1400
replace 4 with 3 3000K : 6411 1300


Vandal-resistant tool (bit) to be ordered separately
code : 9800 0003

Coding: replace the two dashes (--) by
the corresponding figures:
example 6411 14--
└─ 00 NO DETECTION
└─ 21 DALI DIMMABLE + SWITCH DIMMING (* EXCEPT LENGTH 375 MM)

Aperture length R (mm)	Frame length L' (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code
390*	405	11	800	73	6425 14--
675	690	21	1800	86	6426 14--
960	975	31	2750	89	6427 14--
1245	1260	43	3650	85	6428 14--

Lumen maintenance: L80B10 / over 72,000 h
L90B50 / over 52,000 h

Coding colour temperature 3000 K: example 4000K: 6425 1400
replace 4 with 3 3000K: 6425 1300

 Vandal-resistant tool (bit) to be ordered separately
code : 9800 0003

Coding: replace the two dashes (--) by the corresponding figures:
example 6425 14--
└─ 00 NO DETECTION
└─ 21 DALI DIMMABLE + SWITCH DIMMING (* EXCEPT LENGTH 390 MM)

Additional options Titan Compact

Codification :
add the corresponding suffix to the product code

example: 6425 1400 ----
└─ 9413 FLAT DUROFLAM® DIFFUSER
└─ 9601 ANTI-GRAFFITI PROTECTION
└─ 9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)

N.B.: through wiring possible on standard codes
by transplanting geartray on terminal block



Flush version in Stainless steel
See page 222

DETAILS

