

TITAN S

A wide range of compact,
high-power luminaires.



BVCert. 6037554





Titan S2



Titan S3



Titan S4




FEATURES:

- High-power vandal-resistant luminaire
- Wall- (Titan S3) or corner- (Titan S2) mounting versions: body and frame in ZP steel
- Flush-mounting version (Titan S4): body and frame in painted 304L stainless steel
- CCT 4000 K, CRI min. 80
- Polyester powder-coated finish
- Opalescent polycarbonate diffuser
- Stainless steel vandal-resistant screws
- Wall- and corner-mounting versions supplied c/w nickel-plated brass cable gland
- Flush-mounting version supplied c/w cable seal
- RAL 7016 ●


OPTIONS AVAILABLE ON REQUEST:

- 3000 K LEDs
- Standby LED
- Opalescent polycarbonate flat diffuser (IK11+ 80J)


Titan S2 - code: 5005 1400




Titan S2




Titan S3 - code: 5025 1400




Titan S3



Titan S4 - code: 5056 1400



Titan S4

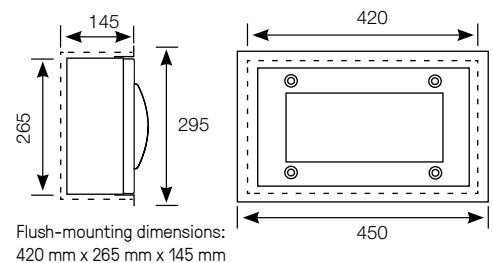

Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	TITAN S2	TITAN S3	TITAN S4
14	1500	107	5006 14--	5026 14--	5056 14--
22	2500	114	5007 14--	5027 14--	5057 14--
34	3450	101	5005 14--	5025 14--	5055 14--

Lumen maintenance: L80B10 / 72,000 h

Vandal-resistant tool (bit) to be ordered separately
code : 9800 0004

Coding colour temperature 3000 K : example 4000K: 5006 14--
replace 4 with 3 3000K : 5006 13--

Coding: replace the two dashes (--) by the corresponding figures:
example 5006 14--

- 00 NO DETECTION
- 12 WITH DETECTION PRO
- 21 DALI DIMMABLE + SWITCH DIMMING

Additional options TITAN S2-3-4

Coding:
add the corresponding suffix to the product code

example : 5006 1400 ----

- 9413 FLAT DUROFLAM® DIFFUSER
- 9415 FLAT OPALESCENT PC DIFFUSER
- 9601 ANTI-GRAFFITI PROTECTION
- 9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)

- TITAN S2 direct 500
- TITAN S3 direct 520
- TITAN S4 direct 504

Flush version Titan S4 in stainless steel
See page 228



DETAILS



