

# URBALINE

An elegant luminaire designed to withstand marine corrosion and extreme vandalism in public spaces and railway premises.



BVCert. 6037554



URBALINE is a LED luminaire vandal-resistant up to 150 joules (IK11\*\*) and marine corrosion resistant thanks to its treatment approved to the Qualanod quality mark, Class 20.


Particularly suitable for public transport infrastructures (stations, pedestrian subways, etc.) as well as public spaces and buildings requiring reinforced protection, Urbaline make it possible to provide precise illumination while reducing energy consumption, thanks to its latest-generation LED modules.

Lighting management is optimized via optional functions like DALI dimming, switch dimming, and detection with warning and standby (consumption less than 0.5 W in standby).

Recyclable and employing recycled materials, it is upgradeable thanks to its plug-in repairable components.




## VANDAL-RESISTANT LUMINAIRE FOR PUBLIC SPACES, BUILDINGS, AND TRANSPORT.

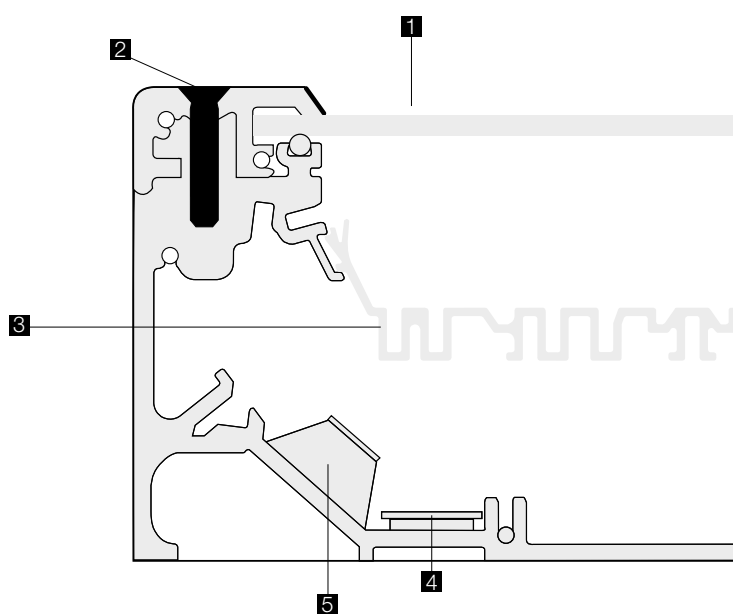

- 1 Opalescent polycarbonate diffuser, (up to 150J)
- 2 Stainless steel tamper-resistant screws
- 3 Gear tray clips into base extrusion
- 4 Marine-grade 6060 aluminium base and frame
- 5 2 cable entries





Urbaline



Urbaline angle




## FEATURES:

- Body: 4 mm thick marine-grade 6060 aluminium
- Qualanod 20  $\mu$  anodizing
- Reinforced end caps in PC (50 joules) or aluminium (150 joules)
- Opalescent polycarbonate diffuser
- Linear LED module
- CCT 4000 K, CRI min. 80
- Stainless steel vandal-resistant screws
- Corner mounting with wall and ceiling fixing


## OPTIONS AVAILABLE ON REQUEST:

- Version with emergency pack
- 3000 K LEDs


Urbaline - code : 6506 9400




Urbaline

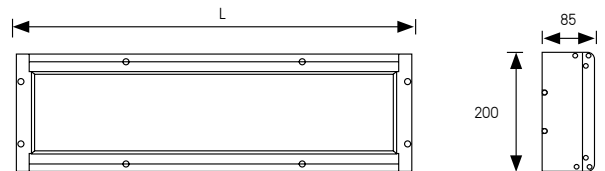

Urbaline Angle  
Code : 6602 9400



Urbaline angle

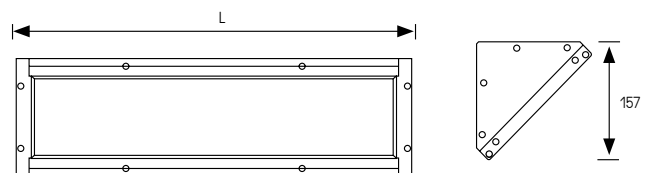

Length (mm)	Length with detection L (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code 50J	Code 150J
370	435	11	900	82	6500 94--	6530 94--
		17	1800	106	6504 94--	6534 94--
650	715	21	2050	98	6501 94--	6531 94--
		43	4150	97	6505 94--	6535 94--
930	995	31	3100	100	6502 94--	6532 94--
		62	6250	145	6506 94--	6536 94--
1210	1275	43	4150	97	6503 94--	6533 94--
		70	7250	104	6507 94--	6537 94--

**Lumen maintenance:** L80B10 / over 72,000 h  
L90B50 / 52,000 h

**Coding colour temperature 3000 K:** example 4000K: 6500 94--  
replace 4 with 3 3000K : 6500 93--

Vandal-resistant tool (bit) to be ordered separately  
code: 9800 0003

**Coding:** replace the two dashes (--) by the corresponding figures:  
example 6500 94--

Radio remote control to be ordered separately  
code: 9800 0010

- 00 NO DETECTION
- 21 DALI DIMMABLE + SWITCH DIMMING
- 12 WITH DETECTION PRO
- 14 WITH DETECTION PRO + EXTINCTION WARNING
- 15 WITH PRO DETECTION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING

Length (mm)	Length with detection L (mm)	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm/W)	Code 50J	Code 150J
370	435	11	900	82	6600 94--	6630 94--
		17	1800	106	6604 94--	6634 94--
650	715	21	2050	98	6601 94--	6631 94--
		43	4150	97	6605 94--	6635 94--
930	995	31	3100	100	6602 94--	6632 94--
		62	6250	145	6606 94--	6636 94--
1210	1275	43	4150	97	6603 94--	6633 94--
		70	7250	104	6607 94--	6637 94--

**Lumen maintenance:** L80B10 / over 72,000 h  
L90B50 / 52,000 h

**Coding colour temperature 3000 K:** example 4000K: 6600 94--  
replace 4 with 3 3000K: 6600 93--

Vandal-resistant tool (bit) to be ordered separately  
code: 9800 0003

**Coding:** replace the two dashes (--) by the corresponding figures:  
example 6600 94--

Radio remote control to be ordered separately  
code: 9800 0010

- 00 NO DETECTION
- 21 DALI DIMMABLE + SWITCH DIMMING
- 12 WITH DETECTION PRO
- 14 WITH DETECTION PRO + EXTINCTION WARNING
- 15 WITH PRO DETECTION + STANDBY WARNING
- 16 WITH PRO DETECTION + RADIO-CONTROL
- 04 SLAVE VERSION + EXTINCTION WARNING
- 05 SLAVE VERSION + STANDBY WARNING
- 44 WITH PRO DETECTION + RADIO-CONTROL + EXTINCTION WARNING
- 45 WITH PRO DETECTION + RADIO-CONTROL + STANDBY WARNING



Bus  
16 18  
22 27

EXIT

LOVE

Map

Information

No smoking