


VAUBAN

Extra low profile surface or flush mounting
architectural luminaire
for public areas.



BVCert. 6037554

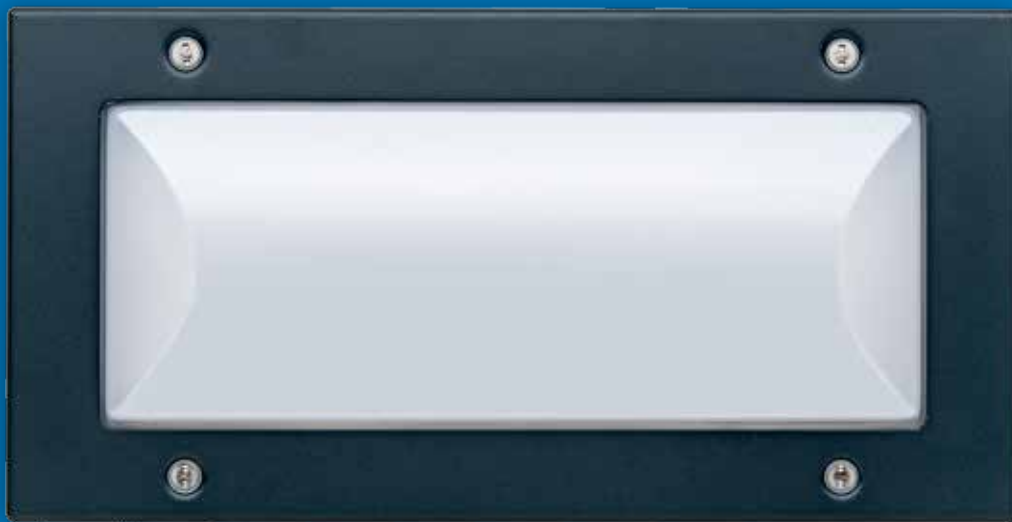



Vauban A



Vauban E




FEATURES:

- Extra low profile architectural luminaire
- Surface-mounting version (A): body and frame in ZP steel
- Flush-mounting (E) version: body and frame in painted 304L stainless steel
- CCT 4000 K, CRI min. 80
- Polyester powder-coated finish
- Opalescent polycarbonate diffuser
- Stainless steel vandal-resistant screws
- Supplied c/w cable seal for surface-mounting (A) and flush-mounting (E) versions
- RAL 7016 ●


OPTIONS AVAILABLE ON REQUEST:

- 3000 K LEDs
- Standby LED
- Opalescent polycarbonate flat diffuser (IK11+ 80J)


Vauban A - code : 5115 1400




Vauban A



Vauban E - code : 5145 1400



Vauban E

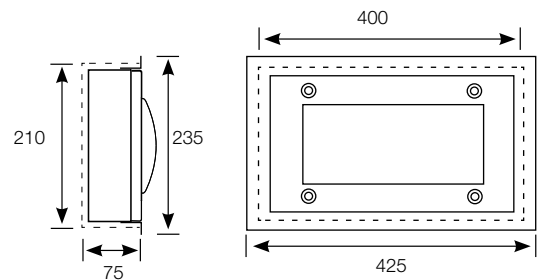


Flush-mounting dimensions:
400 mm x 210 mm x 75 mm



Vauban E flush version in stainless steel see page 232

Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	VAUBAN A	VAUBAN E
8	725	91	5115 1400	5145 1400
17	1700	100	5116 1400	5146 1400

Lumen maintenance: L80B10 / over 72,000 h
L90B50 / 52,000 h

 Vandal-resistant tool (bit) to be ordered separately
code : 9800 0004

Coding colour temperature 3000 K : example 4000K : 5115 1400
replace 4 with 3
3000K : 5115 1300

Codification: replace the two dashes (--) by
the corresponding figures:

example 5115 14--
 00 NO DETECTION
 21 DALI DIMMABLE + SWITCH DIMMING + STANDBY WARNING

Additional options VAUBAN

Coding:
add the corresponding suffix to the product code

example : 5115 1400 ----
 9413 FLAT DUROFLAM® DIFFUSER
 9415 FLAT OPALESCENT PC DIFFUSER
 9601 ANTI-GRAFFITI PROTECTION
 9702 STAINLESS STEEL CROSSPOINT SCREWS (VK44)

VAUBAN A  direct 511

VAUBAN E  direct 513

DETAILS



