

VOILA

A very robust, elegant luminaire
from an eco-design policy, suitable for low
consumption residential buildings.



BVCert. 6037554



The Voila is an elegant, very sturdy luminaire, resulting from a constantly-improving eco-design procedure:

- The new LED fittings and their management system, together with the improvement in the light transmission of the polycarbonate allow an increase in luminous efficiency of approximately 20% over the previous generation.

- The components are recyclable, repairable, and replaceable, in line with the principle of a circular economy, and thereby limit the environmental impact.




**GREATER CIRCULAR
ECONOMY, HIGHER
ENERGY-EFFICIENCY!**

Plain or two-colour versions...



- 1 Opalescent or prismatic polycarbonate diffuser (20J)
- 2 Screw covers + captive, stainless steel vandal-resistant screws
- 3 Rip-out-resistant base
- 4 Side and rear cable entries
- 5 Silicone gasket to IP55

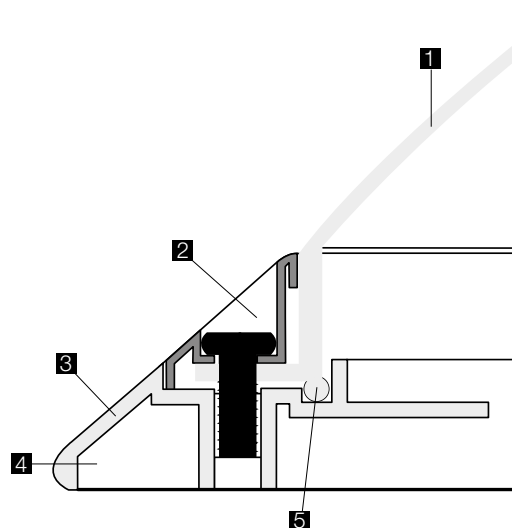





FEATURES:



- Low-consumption architectural luminaire
- Single- or two-colour recycled polycarbonate base
- Opalescent polycarbonate diffuser
- Captive, stainless steel vandal-resistant screws
- Side and rear cable entries
- CCT 4000 K, CRI min. 80
- Design: Xavier Houy
- RAL 9003 ○
- RAL 7035 ●
- RAL 9005 ●

OPTIONS AVAILABLE ON REQUEST:

- 3000 K LEDs
- Version with emergency pack
- Standby LED
- Adaptor bracket, to use existing fixings:
code 98100015

ACCESSORIES FOR TWO-COLOUR VERSION:

- White screw cover RAL9003 ○ **code: 9810 0012**
- Grey screw cover RAL7035 ● **code: 9810 0011**
- Black screw cover RAL9005 ● **code: 9810 0003**

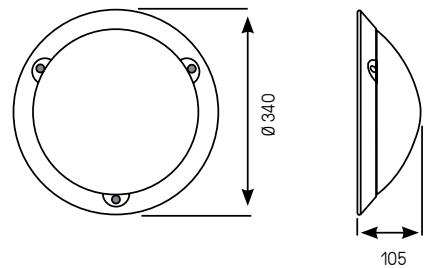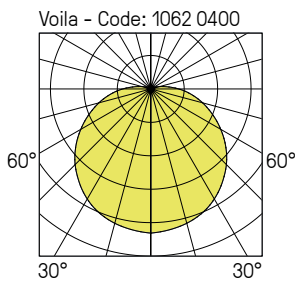

LED modules	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	White RAL 9003	Grey RAL 7035	Black RAL 9005
LED 1200	9	1080	121	1060 04--	1060 34--	1060 24--
LED 1800	13	1500	116	1061 04--	1061 34--	1061 24--
LED 2400	18	2130	118	1062 04--	1062 34--	1062 24--
LED 3000	20	2550	127	1067 04--	1067 34--	1067 24--

Lumen maintenance: L80B10 / 72,000 h



Radio remote control to be ordered separately
code : 9800 0010



Vandal-resistant tool (bit) to be ordered separately
code : 9800 0003

Coding colour temperature 3000 K :
replace 4 with 3
example 4000K : 1060 04--
3000K : 1060 03--

Coding: replace the two dashes (--) by the corresponding figures:

- example 1060 04--
- 00 NO DETECTION
 - 21 DALI DIMMABLE + SWITCH DIMMING
 - 11 WITH DETECTION
 - 13 WITH PRO DETECTION + EXTINCTION OR STANDBY WARNING
 - 16 WITH PRO DETECTION + RADIO-CONTROL
 - 17 WITH PRO DETECTION + EXTINCTION OR STANDBY WARNING + RADIO-CONTROL
 - 03 SLAVE VERSION + EXTINCTION OR STANDBY WARNING
 - 07 SLAVE VERSION + EXTINCTION OR STANDBY WARNING + RADIO-CONTROL

Designation	Base	Power (W)	Luminaire light output (lm)	Luminaire efficacy (lm / W)	White RAL 9003	Grey RAL 7035	Black RAL 9005
E27 (W/O lamp)	E27	-	-	-	1040 00--	1040 30--	1040 20--

Coding: replace the two dashes (--) by the corresponding figures:

- example 1040 00--
- 00 NO DETECTION
 - 11 WITH DETECTION

Additional options VOILA

Coding:
add the corresponding suffix to the product code

example : 1060 0400 ----
9702 STAINLESS STEEL CROSSPOINT SCREWS (VK24)

